



ЦНЦ (СО2) ЛАСЕР

RK-1530-PRO

РЕЗЕРВНИ ДЕЛОВИ




X-Axis Stepper Motor

Brand: Leadshine
 Model: 573S15-L NEMA23
 Step Angle: 1.2 degrees
 Holding Torque: 1.5N.m
 Power: 5.8A Peak



Y-Axis Stepper Motor (x2)

Brand: Leadshine
 Model: 573S15-L NEMA23
 Step Angle: 1.2 degrees
 Holding Torque: 1.5N.m
 Power: 5.8A Peak

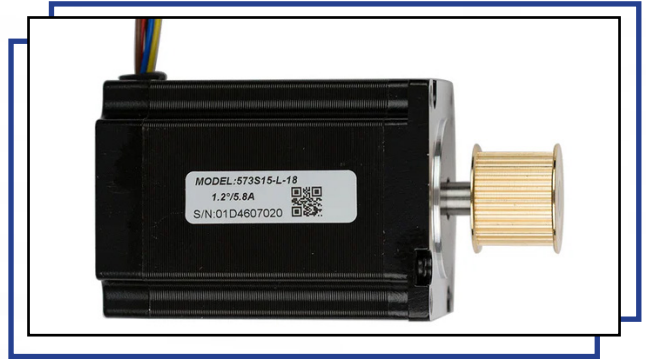

Z-Axis Auto Leveling Stepper Motor

Model: 17HS4218 NEMA17
 Step Angle: 1.8 degrees
 Holding Torque: 12N.cm
 Power: 1.8A



X-Axis Linear Rails

Brand: HIWIN
 Model: HGR25R
 Height: 22mm
 Width: 25mm



Y-Axis Linear Rails

Brand: HIWIN
 Model: HGR20R
 Height: 17.5mm
 Width: 20mm



Z-Axis Linear Rails

Brand: HIWIN
 Model: MGNR12
 Height: 8mm
 Width: 12mm




X-Axis Linear Ball Bearing Block/Carriage

Model: HG25



Y-Axis Linear Ball Bearing Block/Carriage

Model: HG20

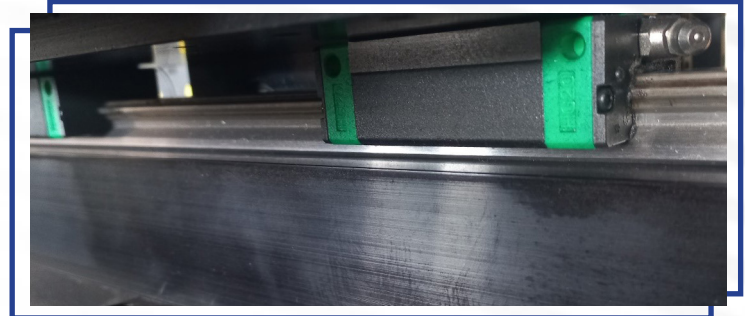

Z-Axis Linear Ball Bearing Block/Carriage

Model: MGN12H



X-Axis Transmission Timing Belt

Brand: SVL



Y-Axis Transmission Timing Belt (x2)

Brand: SLV Material
Model: 38-HTD5M




Z-Axis Ballscrew


Diameter: 10mm



X-Axis Stepper Motor Driver

Brand: Leadshine
Model: 3DM580S Microstep Drive
Supply Voltage: DC 20-50V
Output Current: 0.5-8A

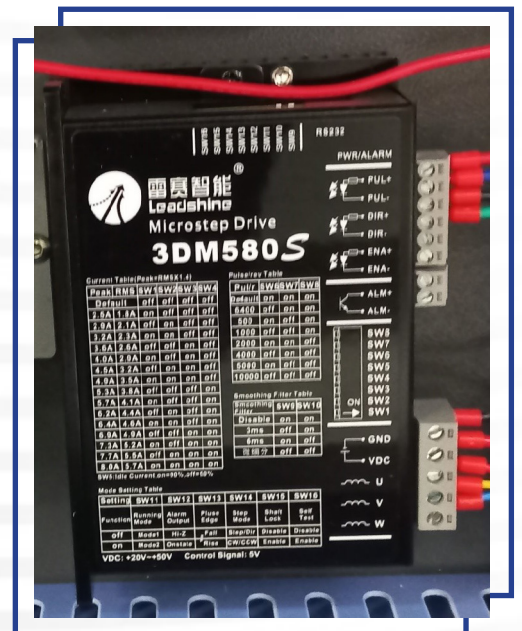

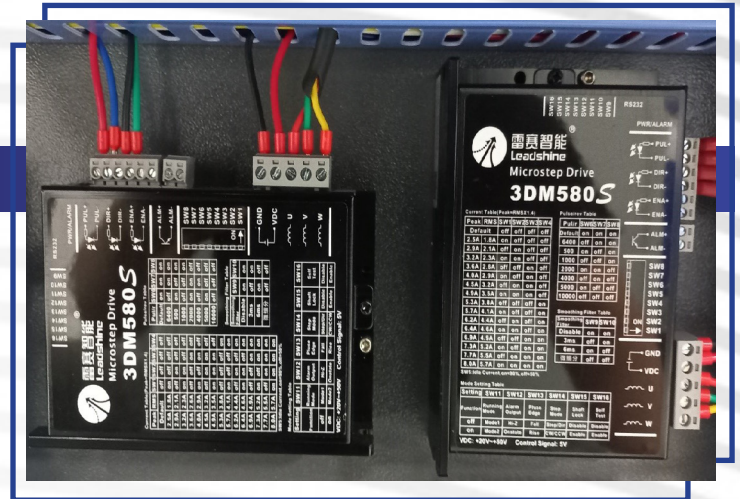


Y-Axis Stepper Motor Driver

Brand: Leadshine
 Model: 3DM580S Microstep Drive
 Supply Voltage: DC 20-50V
 Output Current: 0.5-8A



Z-Axis Stepper Motor Driver

Model: YM422-D
 Supply Voltage: DC 10-40V
 Output Current: 0.6-2.2A

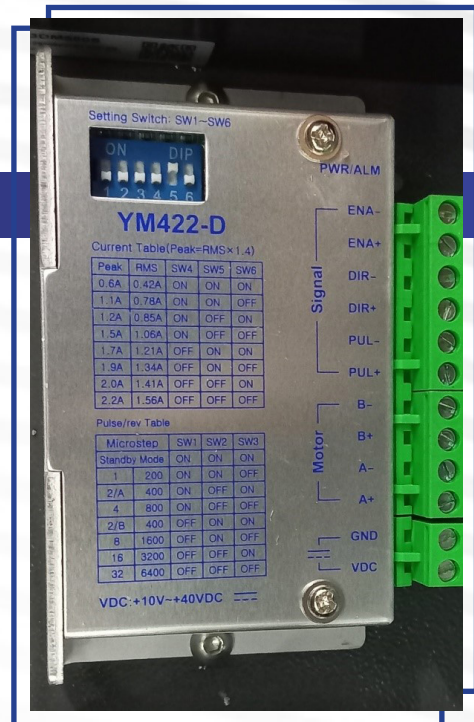

Power Supply 24V

Brand: GuanYang
 Model: GY250W-24-B
 Input: AC 110-220V 50-60Hz
 Output: DC 24V 12A

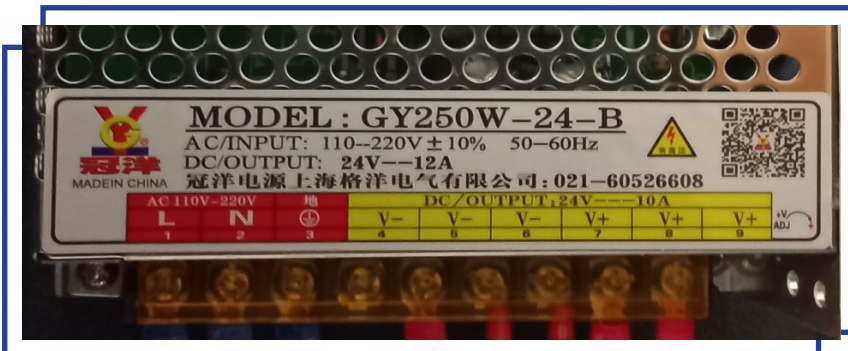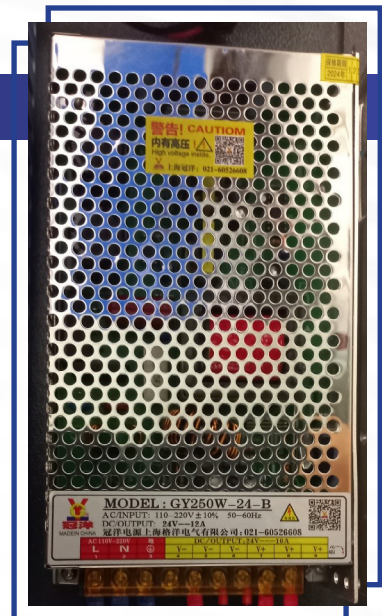



Signal Filter

Brand: HONGDA
 Model: HD2AC-10A
 Power: AC 110/250V 10A
 50/60Hz




Power Supply 5V/24V/48V

Brand: GuanYang
 Model: GY600W-5-24-46-A
 Input: AC 110-220V 50/60Hz
 Output: DC 5V-3A; 24V-3A; 46V-11A

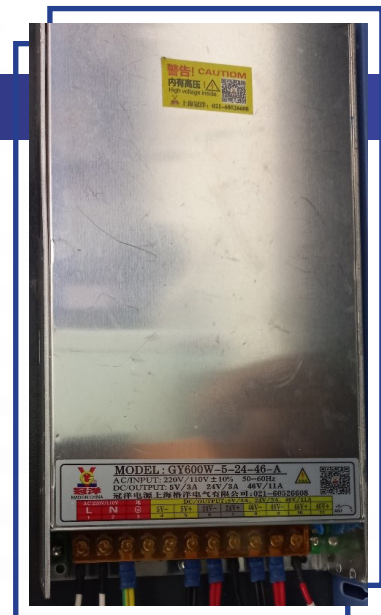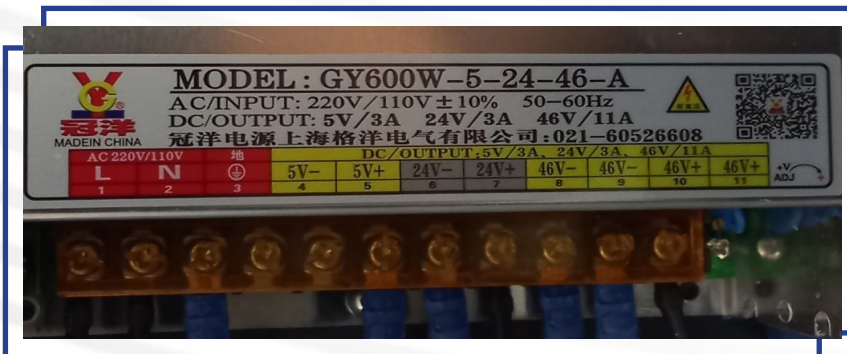

X-Axis Inductive Proximity Switch/Sensor

Type: NPN
 Model: PL-05NB
 Power: DC 10-30V
 Sensing Range: 0-5mm

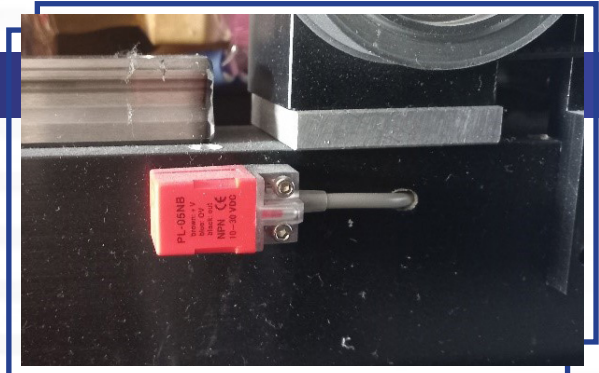

Y-Axis Inductive Proximity Switch/Sensor

Type: NPN
 Model: PL-05NB
 Power: DC 10-30V
 Sensing Range: 0-5mm




Z-Axis Inductive Proximity Switch/Sensor (x2)

Brand: Taidacent
 Model: BX1-F3
 Power: DC 12-24V 15mA
 Sensing Range: 0-1.2mm




Contactor

Brand: Chint
 Model: NXC-32

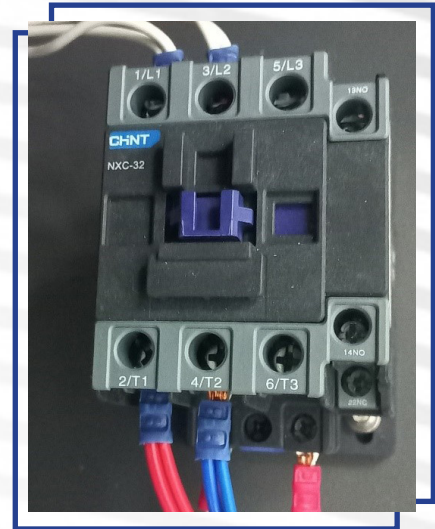


Live Focus System Controller

Brand: Ruida
 Model: LFS-PM-T43 pulse height controller
 Detection Accuracy: < 0.01mm
 Capacitance Detection Range: 0-9.9mm

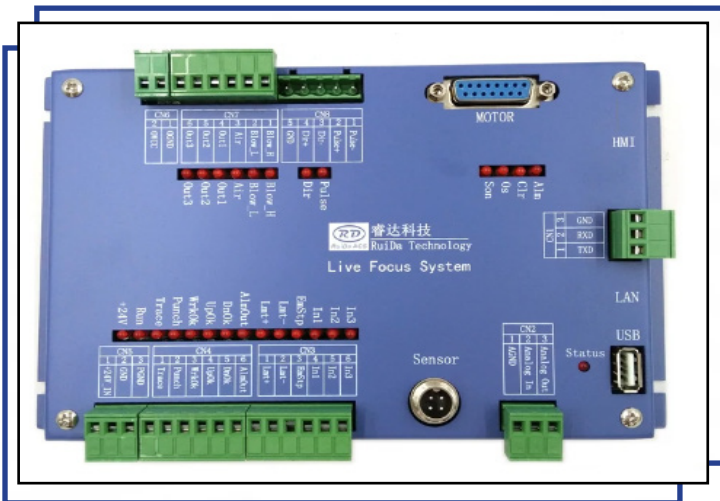

Main Controller

Brand: Ruida
 Model: RDC6332M-B (EC)

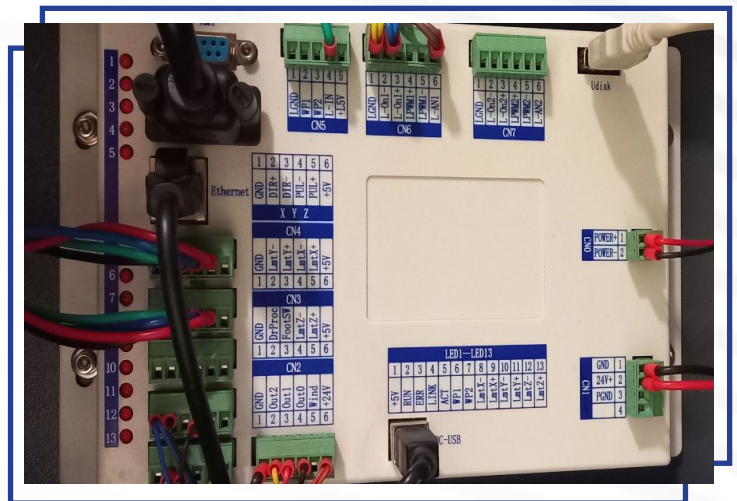

Controller Screen Panel

Brand: Ruida
 Model: RDC6332M (Panel)



Live Focus Control Panel

Brand: Ruida
 Model: T4315WT
 Input Voltage: DC 24V



Laser Tube

Brand: JOYLASER
 Model: SX300A
 Power: 300W



Solenoid Valve

Brand: CNSY
 Power: DC 24V
 170mA 4.8W



Power Relay

Brand: LinBo
 Model: HH62PL
 Power: AC 250V 10A
 DC 28V 10A



Laser Tube Power Supply (x2)

#1
 Brand: Yongli
 Model: YL-U2



#2
 Brand: ZYE Laser
 Model: MYJG150W-Z
 Power: AC 220V



Pressure Regulator

Brand: BLCH
 Model: AR-2000
 Max Flow: 650L/min



Separator



Circuit Breaker

Brand: TENGGEN
 Model: TGB1N-63 C20
 Rated Current: 63A
 Rated Voltage: 400V




Industrial Chiller

Brand: S&A
 Model: CW 6000




Dust/Smoke Extraction Unit


Model: YQ-14880
 Power: AC 220V 50Hz 550W
 RPM: 2800rpm
 Intake Diameter: 148mm
 Exit Diameter: 148mm
 Airflow: 18m³/min
 Static Pressure: 1,7KPa

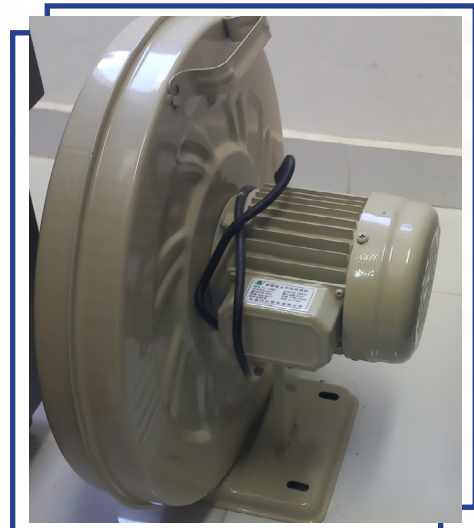


Y-Axis Belt Tensioning Block (x4)

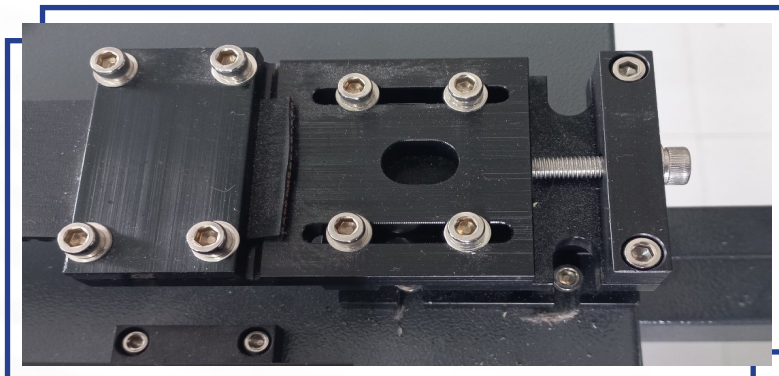

Anti-Shock, Anti-Vibration Leg Stand (x6)

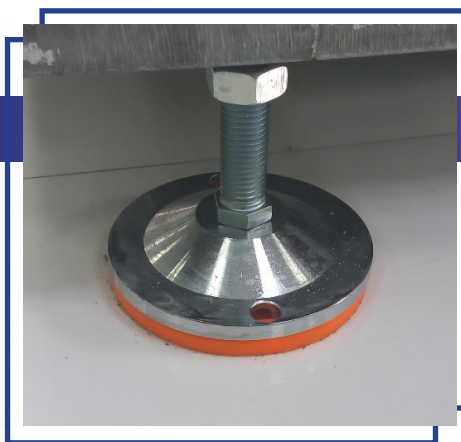


Mirror Mount (x4)

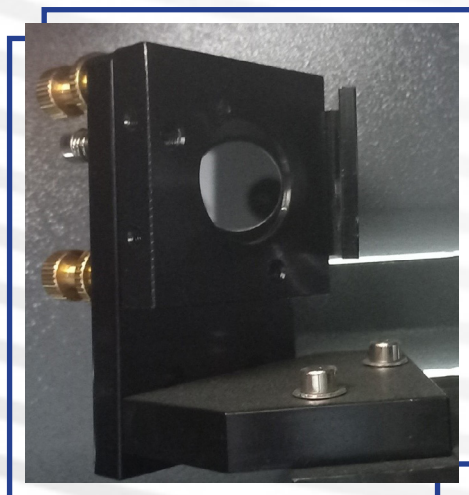


Y-Axis Transmission Shaft

Diameter: 25mm
Length: 1550mm

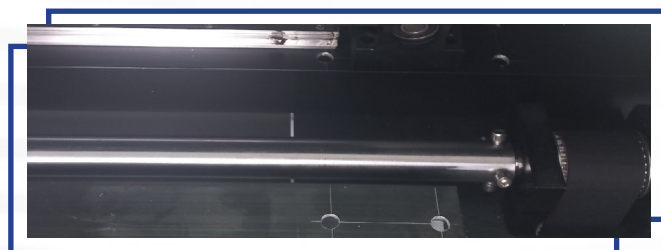


Y-Axis Transmission Shaft Small Belt Pulley

Diameter: 42mm
Shaft Diameter: 15mm

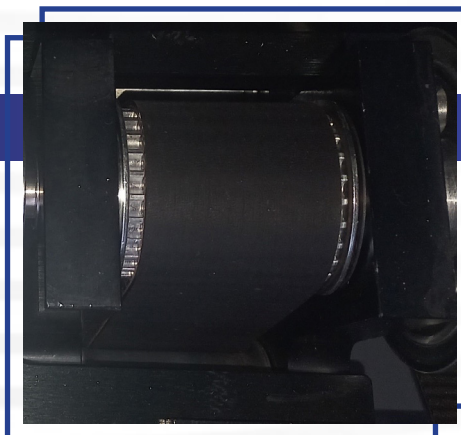


Y-Axis Transmission Shaft Large Belt Pulley

Diameter: 74mm
 Shaft Diameter: 15mm

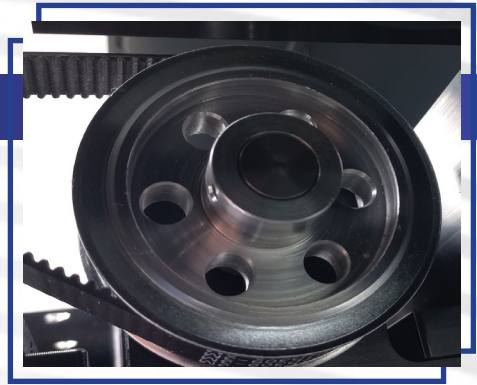

Y-axis Motor Belt Pulley

Diameter: 26mm
 Shaft Diameter: 8mm

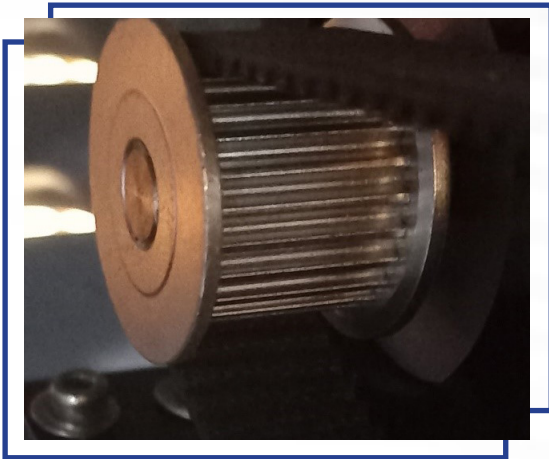


X-Axis Belt Pulley Bearing

Brand: JVB
 Type: 6000RS
 Dimensions: 10x26x8




X-Axis Timing Belt (Pulley)


Type: HDT309-3M

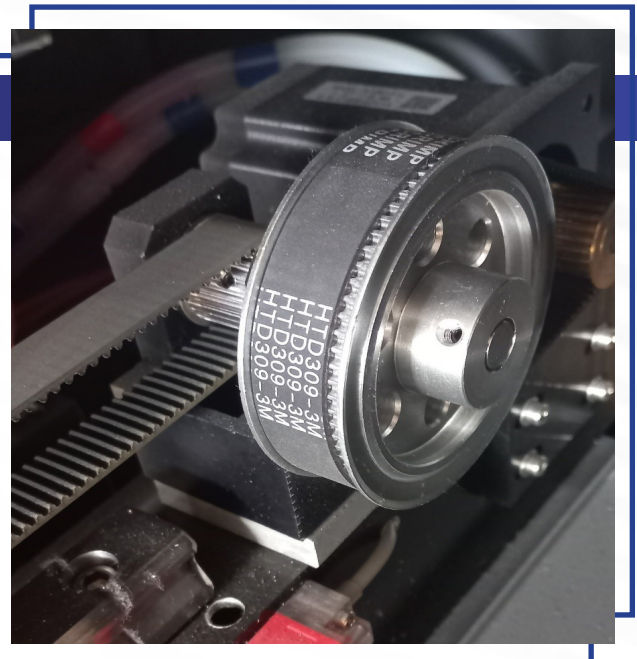

Specialized Hybrid Laser Head

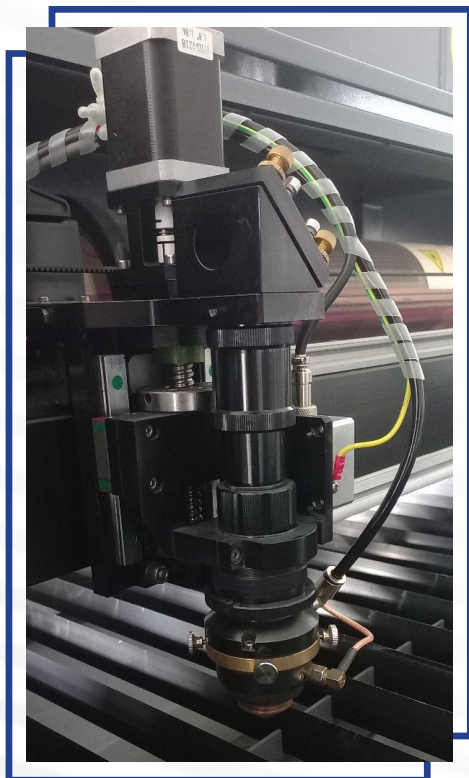

Hybrid Laser Head Signal Filter

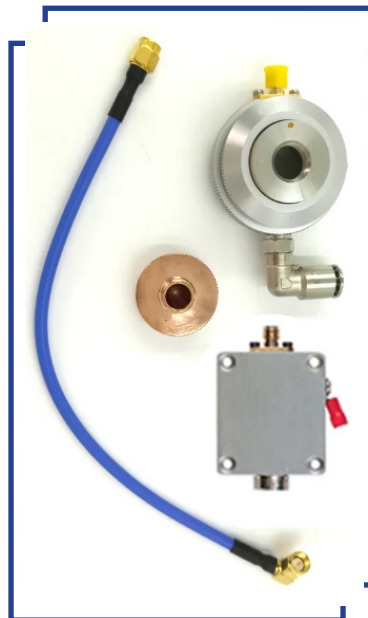

Y-Axis Drag Chain Cable Organizer

Cable Slot: 50mm
Height: 35mm

X-Axis Drag Chain Cable Organizer

Cable Slot: 20mm
Height: 15mm



Mirrors (x4)



Focusing Lens





КОНТАКТ

☎ Информации: +389 70 215 994

☎ Продажен салон: 02 3095 002

✂ Сервис: +389 71 270 963

✉ Е-маил: info@radek.com.mk

🌐 Вебсајт: www.radek.com.mk

📍 Адреса: Јадранска Магистрала 716

РАБОТНО ВРЕМЕ

Пон.-Пет.: 09:00-17:00

Саб.: 09:00-14:00



GOOGLE MAPS:
RADEK WOODWORKING
MACHINES



Web

www.radek.com.mk



Facebook

[radek-woodworking machines](https://www.facebook.com/radek-woodworking-machines)



Instagram

[radek_woodworking_machines](https://www.instagram.com/radek_woodworking_machines)



Startuvaj.mk

www.startuvaj.mk



YouTube

[radek woodworking machines](https://www.youtube.com/radek-woodworking-machines)

**WOODWORKING AND
METALWORKING MACHINES**