




ЦНЦ ПЛАЗМА

RK-153M-ECO

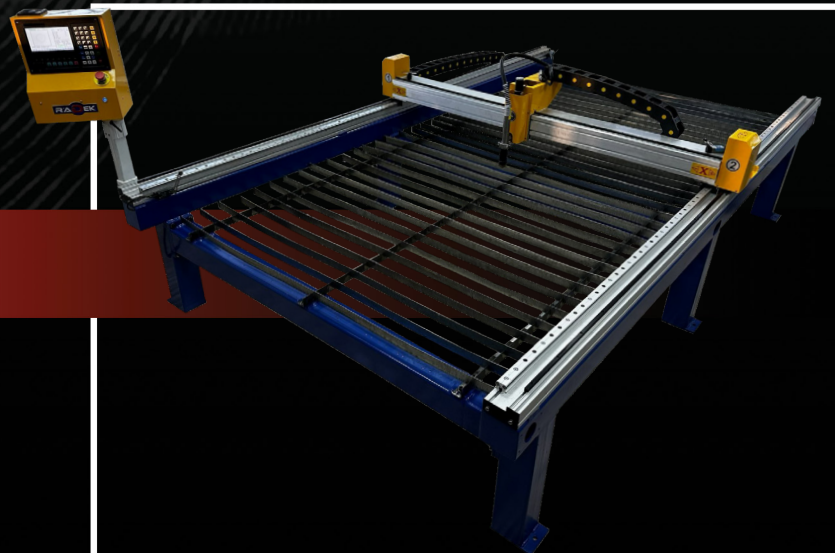

РЕЗЕРВНИ ДЕЛОВИ


X-Axis Stepper Motor

Model: NEMA23
 Step Angle: 1.6 degrees
 Rated Current: 3A



Y-Axis Stepper Motor (x2)

Model: NEMA23
 Step Angle: 1.6 degrees
 Rated Current: 3A

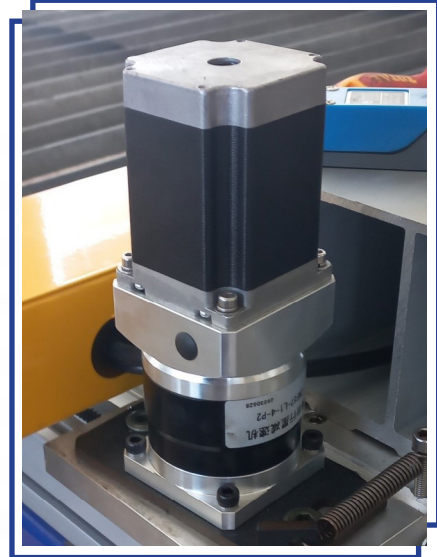

Z-Axis Torch Auto-Leveling BLDC Motor


Power:24V



Y-Axis Roller Linear Guide

Width: 36mm
 Height: 25.5mm
 Model: LGD12

Y-Axis Wheel Carriage

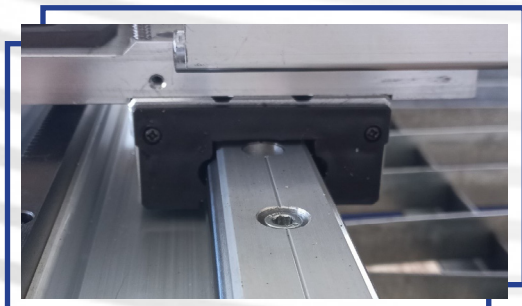


X-Axis Roller Linear Guide

Length: 1885mm
Height: 110mm



X-Axis Wheel Carriage

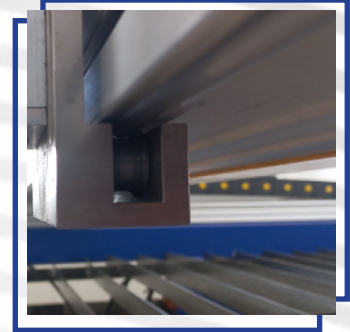

X-Axis Gear Rack

Width: 12mm
Height: 10mm




Y-Axis Gear Rack (x2)

Width: 12mm
Height: 10mm




X-Axis Gear Pinion

Height: 10mm
Diameter: 27mm

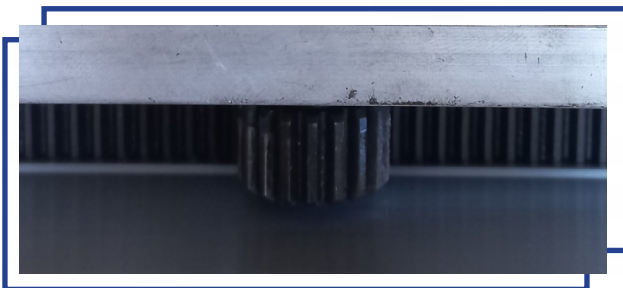

Y-Axis Gear Pinion (x2)

Height: 10mm
Diameter: 27mm

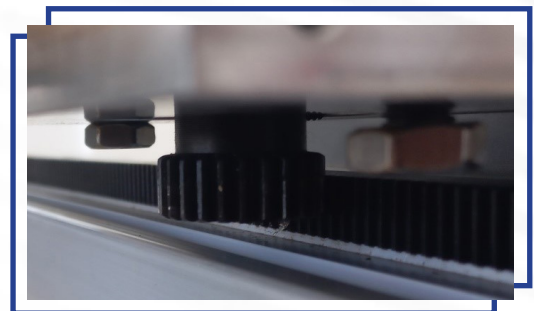


X-Axis Mechanical Limit Switch (x2)

Brand: Moujer
 Model: ME-8108
 Power: AC 250V 5A / DC 115V 0.4A




Y-Axis Mechanical Limit Switch (x2)

Brand: Chint
 Model: YBLX-ME/8107
 Power: AC 380V 0.8A / DC 220V 0.16A

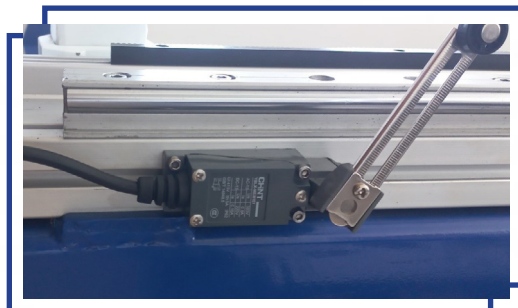

Z-Axis PTCH Mechanical Limit Switch (x2)

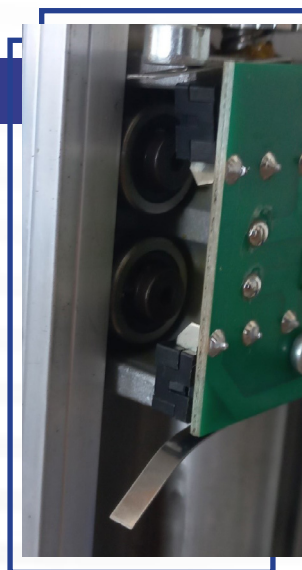

X-Axis Drag Chain Cable Carrier

Cable Slot Width: 60mm
 Height: 65mm



Y-Axis Drag Chain Cable Carrier

Cable Slot Width: 60mm
Height: 65mm




Stepper Motor Driver (x3)

Brand: LeadShine
Model: M542C Microstep Drive
Supply Voltage: AC 36V peak AC 50V
Output Current: 1 - 4.2A (max)
Step Angle: 1.8 degrees




Controller

Brand: Fangling
Model: F2100B 2-Axis Controller
Power: DC 24V 300mA (max)
Pulse Frequency: 200KHz (max)
Screen: 7 Inch LCD Display

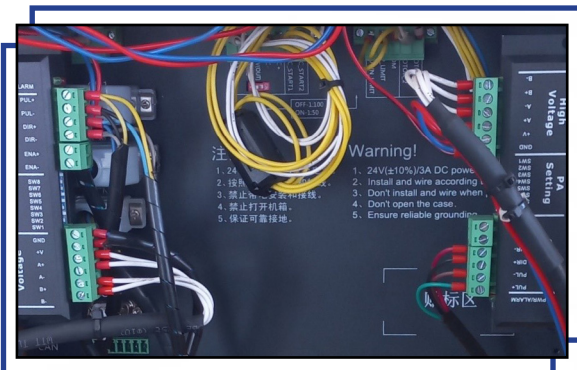


Power Supply 24V

Brand: MeanWell
Model: 5-350-24
Input: AC 120V 6.5A / AC 240V 4.0A
50/60Hz
Output : DC 24V 14.6A 350W

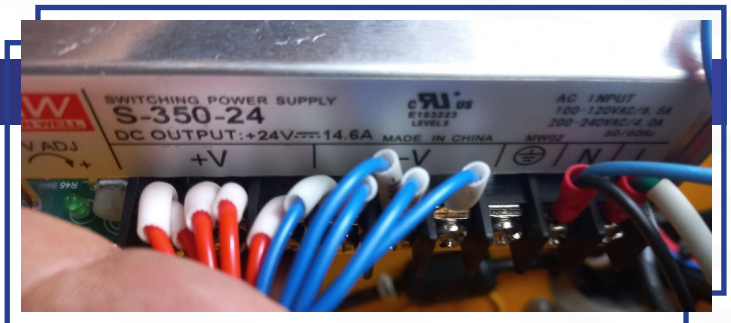

PTHC Plasma Torch Height Controller

Model: F1630X-DIV-V2.2
 Brand: Fangling
 Operating Voltage: DC 24V

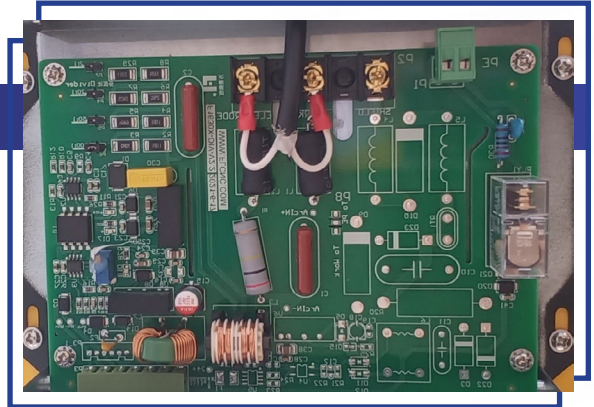

Y-Axis Stepper Motor Planetary Gear Reducer

Model: ZNF57-L1-4-P2



Plasma Torch

Brand: Yikuai
 Model: YK100-H



Plasma Arc Generator


Brand: FyeBoon
 Model: LGK-60 IGBT
 Input Voltage: AC3 – 380V 50Hz
 Output Current: 60A
 Cutting Thickness: 0.3-12mm (max 20mm)
 Gas Type: Compressed Air
 Gas Pressure: 0.4-0.6MPa
 Arc Ignition: Non Contact Mode




Plasma Cutter Electrode



Anti-Vibration, Anti-Shock Leg Stand (x6)

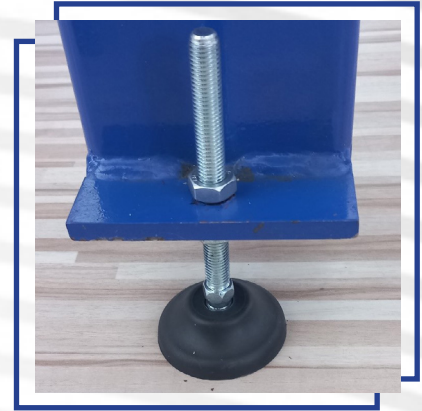


Plasma Cutting Sacrificial Slat Trays

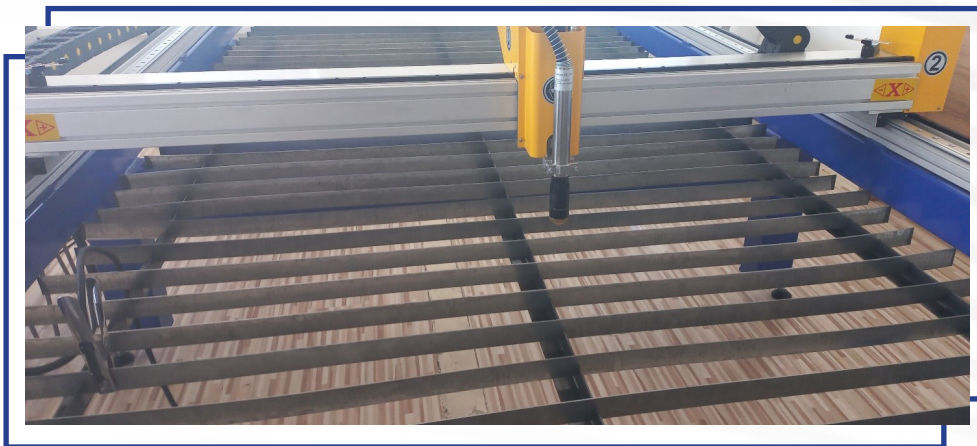

Voltage Divider Board



PTHC BLDC Motor Shaft Coupler

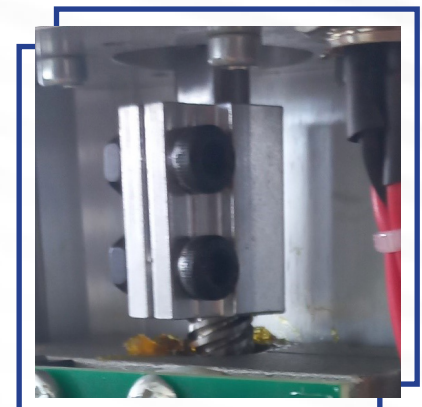



КОНТАКТ

☎ Информации: +389 70 215 994

☎ Продажен салон: 02 3095 002

✂ Сервис: +389 71 270 963

✉ Е-маил: info@radek.com.mk

🌐 Вебсајт: www.radek.com.mk

📍 Адреса: Јадранска Магистрала 716

РАБОТНО ВРЕМЕ

Пон.-Пет.: 09:00-17:00

Саб.: 09:00-14:00



GOOGLE MAPS:
RADEK WOODWORKING
MACHINES



Web

www.radek.com.mk



Facebook

[radek-woodworking machines](https://www.facebook.com/radek-woodworking-machines)



Instagram

[radek_woodworking_machines](https://www.instagram.com/radek_woodworking_machines)



Startuvaj.mk

www.startuvaj.mk



YouTube

[radek woodworking machines](https://www.youtube.com/radek-woodworking-machines)

**WOODWORKING AND
METALWORKING MACHINES**