




ЦНЦ ПЛАЗМА

RK-153P-PRO

РЕЗЕРВНИ ДЕЛОВИ

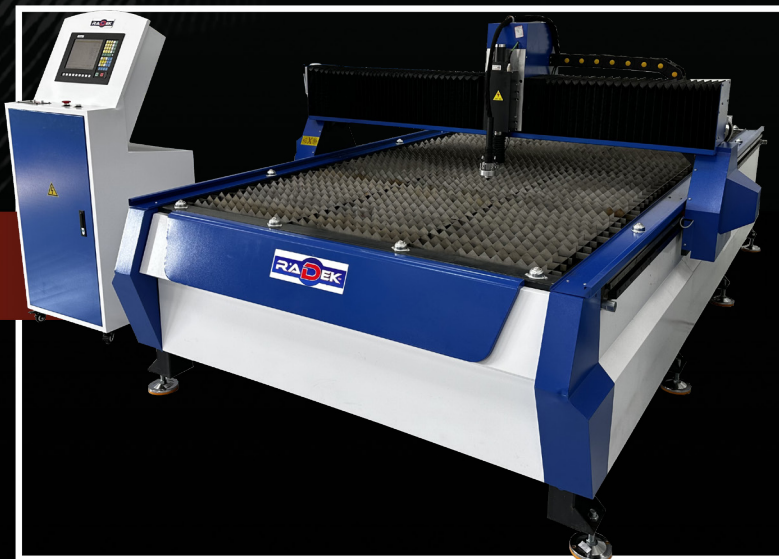

Power Transformer

Model: JBK5-800VA
JB/T5555

Power:

Input:



1-2:220V

Output:

11-12:70V

11-12:70V

11-12:70V

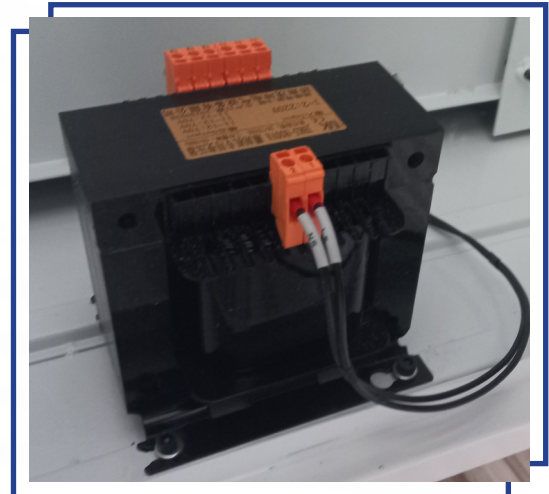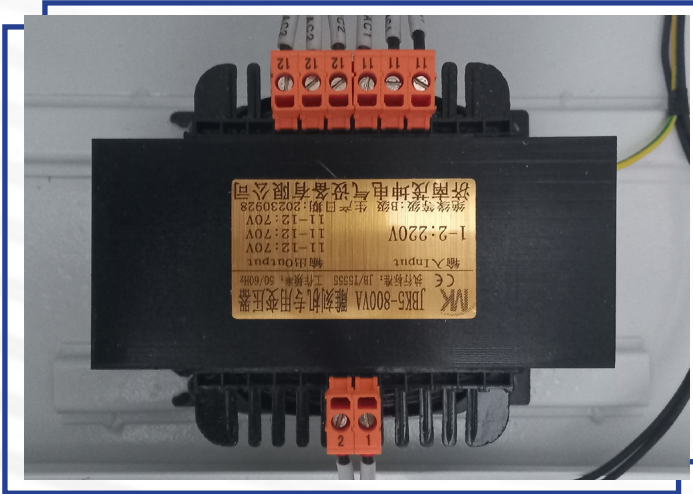

Plasma Torch Height Controller (Interface)

Brand: HYD // ShenZhen Hong YuDa CNC TECH

Model: XPTHC-4H III

Power: DC 24V or DC 20V-30V 2A


Motor: DC 24V 1A

Max Power: 25W



Power Buttons

Emergency Stop Switch:
 Brand: SHQIU
 Model: CQ38
 Power: AC660V 10A

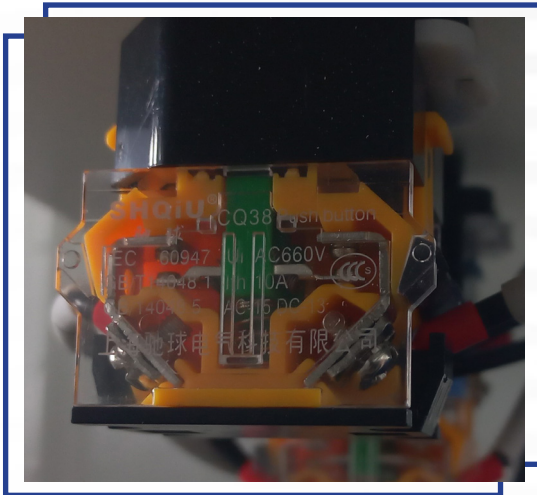

On/Off Button:
 Brand: SHQIU
 Model: CQ38 PushButton
 Power: AC 660V 10A
 LED Indicator: AC 220V



Control Screen / Control Computer

Brand: Starfire
 Model: Starfire SF-2410QG
 Power: DC 24V 2A
 S/N: 1165011022181



Plasma Cutting Nozzle and Electrode Set



Retaining Ceramic Shield Cap



Plasma Torch Height Controller

Brand: HYD THC
 Model: XPTHC-4H
 Power: DC 24V or DC 20V-30V 2A
 Motor: DC 24V 1A
 Max Power: 25W



Circuit Breaker

Brand: Chint
 Model: NXBLE-32 32C
 Rated Current: 32A
 Rated Voltage: 230V (1P+N) 2PH
 Frequency: 50/60 Hz



Contactor

Brand: Chint
 Model: NXC-18
 Number of poles: 3
 Power: AC 220V 50/60Hz 7.5kW



Stepper Motor Y-Axis (x2)

Brand: Act Motor
 Model: 34HS1450D14L34J6-26-PT
 Degrees: 1.8
 Power: 5A



Stepper Motor X-Axis

Brand: Act Motor
 Model: 34HS1450D14L34J6-26-PT
 Degrees: 1.8
 Power: 5A



DC Motor Z-Axis/PTHC

Brand:
 Model: JYKB-130-DC24V
 Power: DC 24V



Belt Transmission Pulley (Secondary) (x3) (2x Y-Axis) (1x X-Axis)

Belt Slot Diameter: 16mm
 Width: 20mm
 Mounting Shaft Diameter: 14mm
 Diameter: 148mm
 Belt: HDT 550-5M


Belt Transmission Pulley (Primary) (x3) (2x Y-Axis) (1x X-Axis)

Belt Slot Diameter : 16mm
 Width: 20mm
 Mounting Shaft Diameter: 14mm
 Diameter: 35mm
 Belt: HDT 550-5M



Stepper Motor Mounting/Transmission Block (x3)

2x Y-Axis
 1x X-Axis

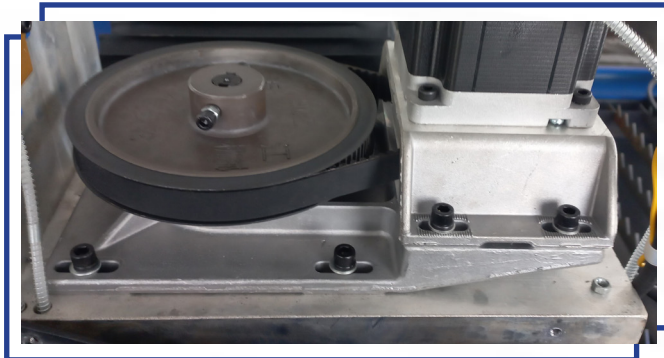

X-Axis Inductive Proximity Switch

Model: SN04-N
 Power: DC 5-30V 200mA




X-Axis Gear Rack

Width: 25mm
Height: 20mm
Angle: 30 Degrees



X-Axis Pinion Gear

Diameter: 33mm
Height: 20mm
Angle: 30 Degrees

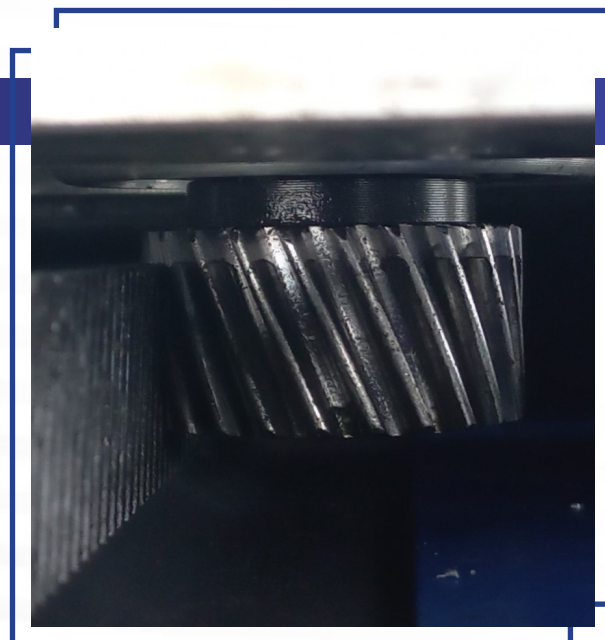


Y-Axis Gear Rack (x2)

Width: 25mm
Height: 20mm
Angle: 30 Degrees




Y-Axis Pinion Gear (x2)

Diameter: 33mm
Height: 20mm
Angle: 30 Degrees

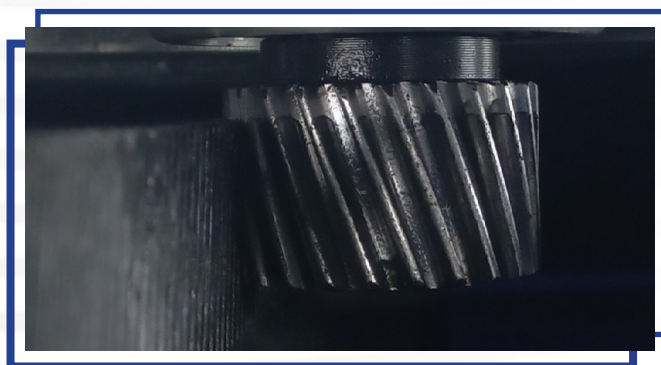

Y-Axis Inductive Proximity Switch

Model: SN04-N
 Power: DC 5-30V 200mA

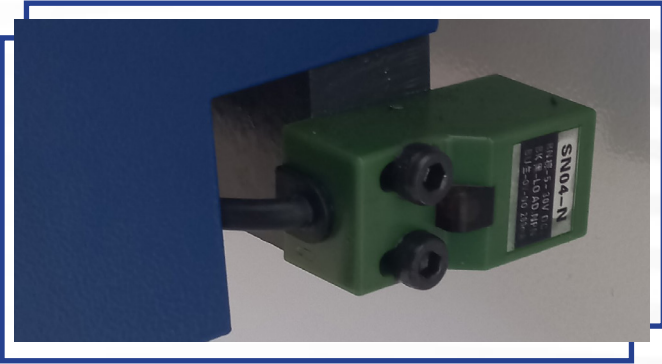


Y-Axis Linear Rails (x2)

Model: HGR20
 Width: 20mm




Y-Axis Linear Bearing Block (x4)

Model: HG20
 Tubing: 4mm

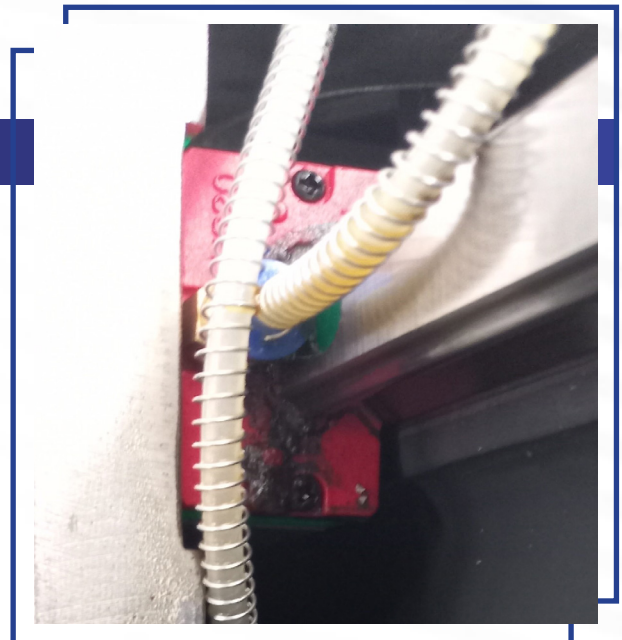


X-Axis Linear Rails (x2)

Model: HGR20
Width: 20mm

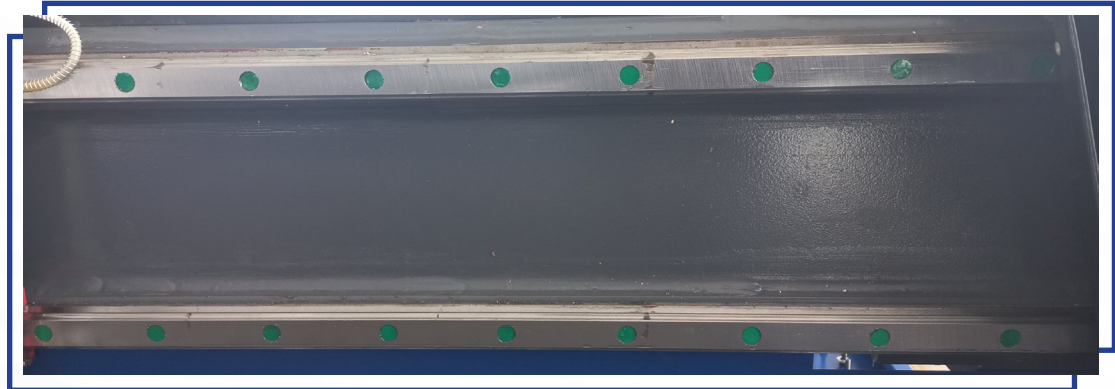

X-Axis Linear Bearing Block (x4)

Model: HG20
Tubing: 4mm

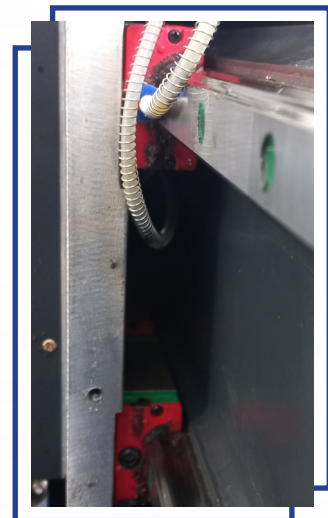


Drag-Chain Cable Carrier Track Y-Axis

Cable Slot Dimensions: 75mm
Height: 35mm



Drag-Chain Cable Carrier Track X-Axis

Cable Slot Dimensions: 50mm
Height: 35mm

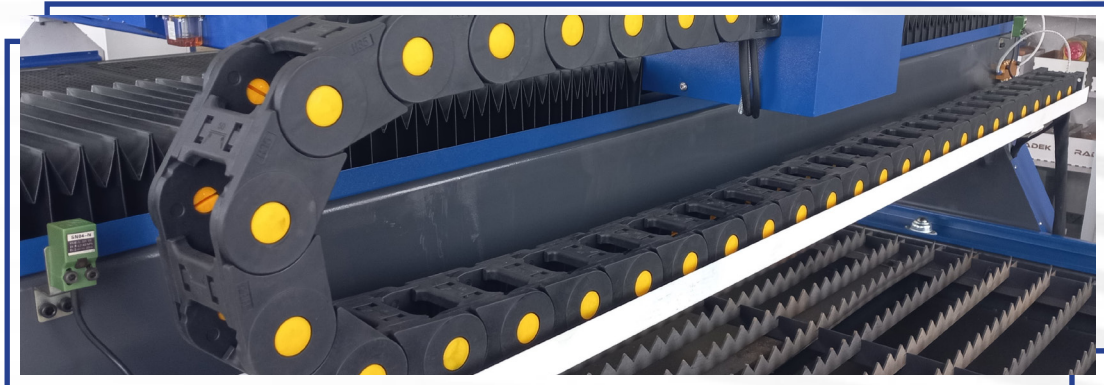


Generic Electrical Cabinet Door Handle



Generic Swing Door Handle with Lock




Anti-Vibration, Shock-Absorbent Leg Stands (x6)

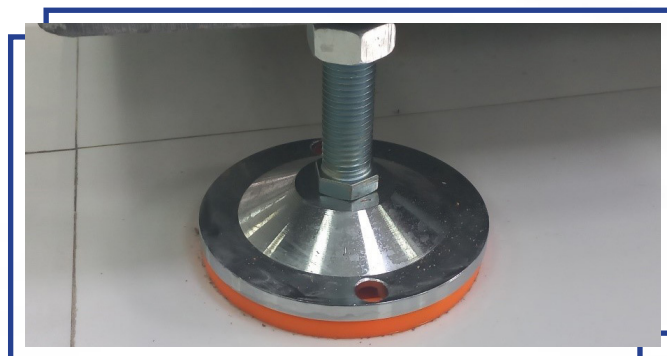

Main Lubrication Oil Distribution Block

Intake Tubing: 4mm
Distribution Tubes: 4mm

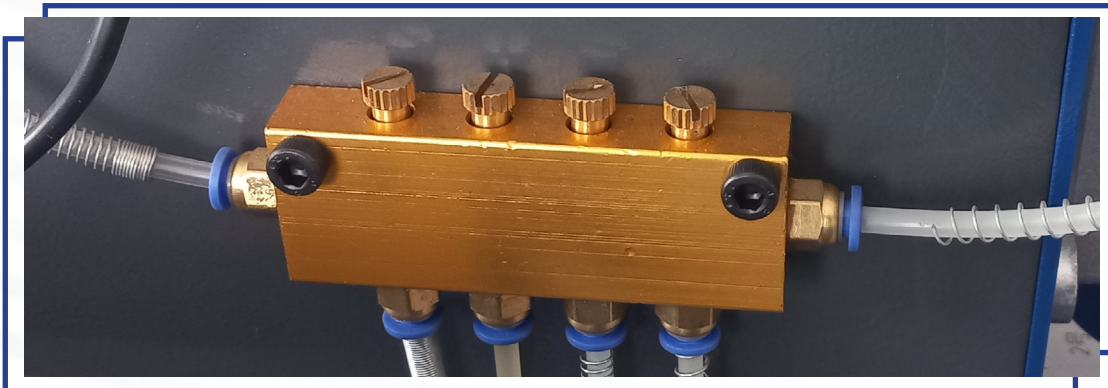

Physical End Stop (x4)




X-Axis Gantry Protective, Flexible Bellows Cover (x2)

Height: 255mm
Width: 220mm



Anti-Collision Plasma Torch Holder

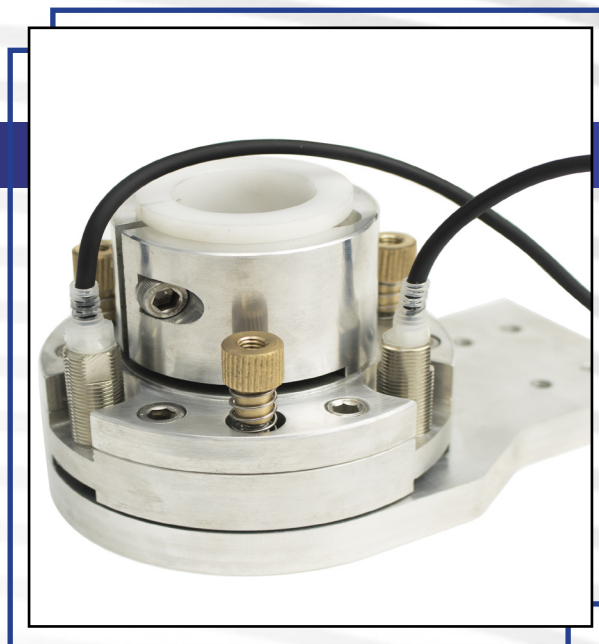


Anti-Collision Holder Sensor (x2)

Brand: Autonics
 Model: PR08-1.5DN
 Power: DC 10-30V 200mA



X-Axis Lubrication Oil Distribution Block

Intake Tubing: 4mm
 Distribution Tubes: 4mm

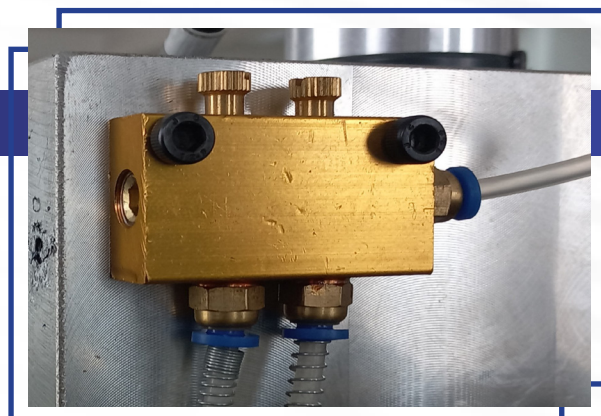


Manual Oil Dispensing Pump

Brand: Mingyuan
 Type: Y-8
 Dispensing Volume: 8CC
 Tank Volume: 500CC
 Intake Tubing: 4mm
 Distribution Tubing: 4mm



Voltage Divider Board

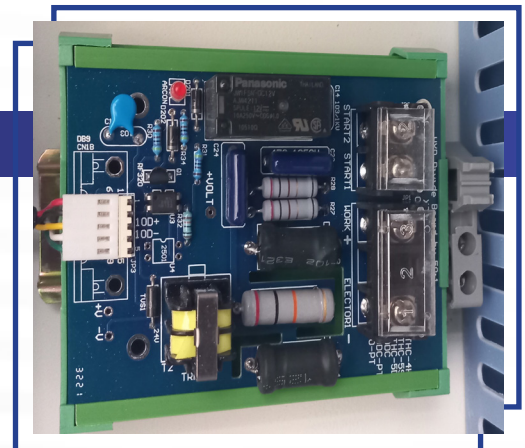


Voltage Divider Board Relay


Brand: Panasonic
 Model: JW1FSN
 Coil Voltage: DC 12V
 Switching Voltage: AC 250V
 Contact Current Rating: 10A



Generic Ball Transfer Unit

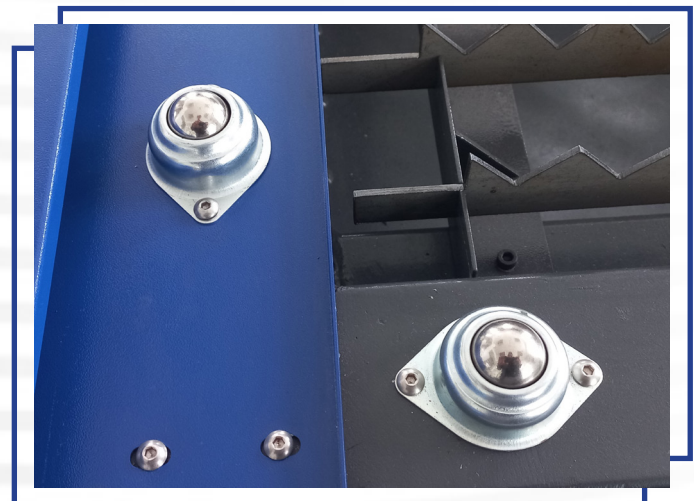

Plasma Cutting Sacrificial Slat Trays

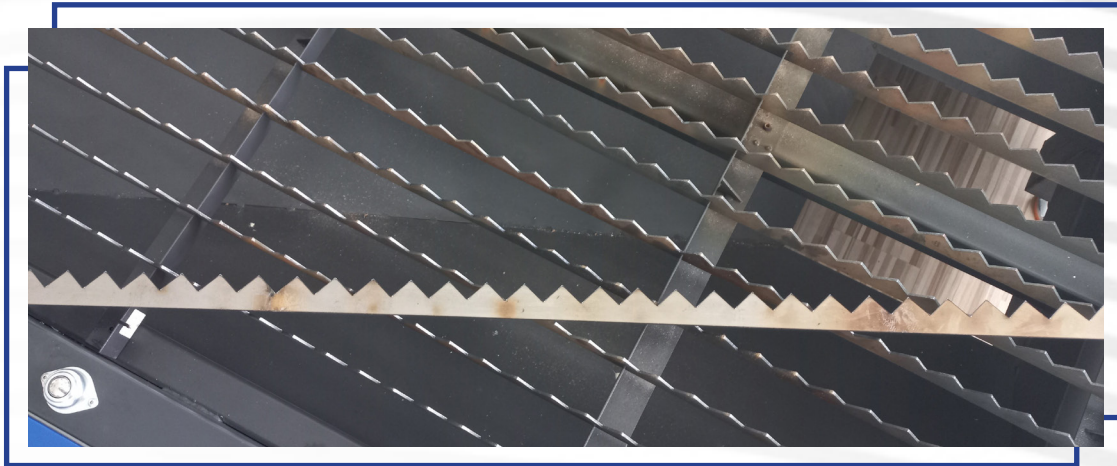

Inverter Plasma Cutting Machine

Brand:	Huayuan	
Model:	LGK-120IGBT	
Input Voltage:	3 – 380V	50Hz
Output Current:	120A	
Output Voltage:	128V	
Open Circuit Voltage:	DC 300V	
Current Adjusting Range:	30-120A	
Max Cutting Thickness:	45mm	
Plasma Gas:	Compressed Air	
Plasma gas working pressure:	0.4-0.6MPa	
Arc Striking Type:	Non-Contact	



Straight Plasma Cutting Torch & Hose

Type:	P80
Length:	15m
Dizni otvor:	1.1mm & 1.3mm 1.5mm 1.7mm





КОНТАКТ

☎ Информации: +389 70 215 994

☎ Продажен салон: 02 3095 002

✂ Сервис: +389 71 270 963

✉ Е-маил: info@radek.com.mk

🌐 Вебсајт: www.radek.com.mk

📍 Адреса: Јадранска Магистрала 716

РАБОТНО ВРЕМЕ

Пон.-Пет.: 09:00-17:00

Саб.: 09:00-14:00



GOOGLE MAPS:
RADEK WOODWORKING
MACHINES



Web

www.radek.com.mk



Facebook

[radek-woodworking machines](https://www.facebook.com/radek-woodworking-machines)



Instagram

[radek_woodworking_machines](https://www.instagram.com/radek_woodworking_machines)



Startuvaj.mk

www.startuvaj.mk



YouTube

[radek woodworking machines](https://www.youtube.com/radek-woodworking-machines)

**WOODWORKING AND
METALWORKING MACHINES**