



RK-5MA-PRO

EDGE BANDING MACHINE

PERFECT FOR SMALL CARPENTRY WORKSHOPS
AND FURNITURE FACILITIES




Edge banding with hot melt glue for PVC and ABS tapes. Simply essential and functional. Designed to be economic, reliable and practical machine for the edge banding of straight, curved and bevel panels.



**1 YEAR WARRANTY
AND UNLIMITED SUPPORT**







Working table size	1000x640+985x163mm
Min. Radius of banding	20mm
Heating power	1.8kW
Feeding power	0.2kW
Total power	2kW
Air pressure	0.4-0.5Mpa
Speed adjustment	Stepless speed
Feeding speed	1-15m/min
Counting form	Counter
Application range	flexional melamine paper/ veneer/plastic/PVC/ABS
Edge thickness	0.3-3mm
Edge width	8-50mm
Shape of working	Straight, curved, bevel
Machine size	1550x1100x820mm
Packing size	950x750x1000mm
Weight	272kg

EASY TO USE

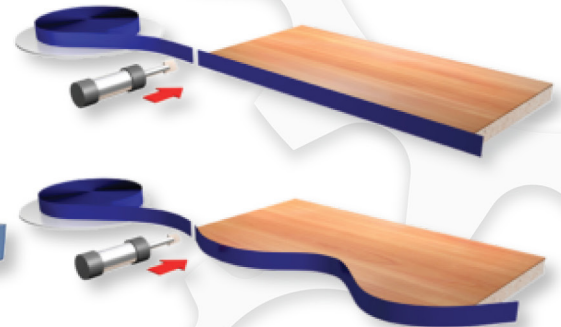

1

The machine is a manual-operation model, with downward glue pot, can be double-sided gelatinized.

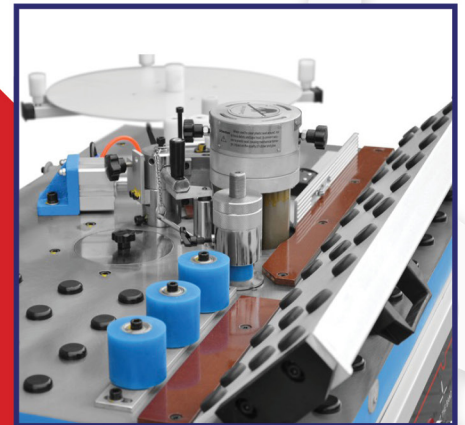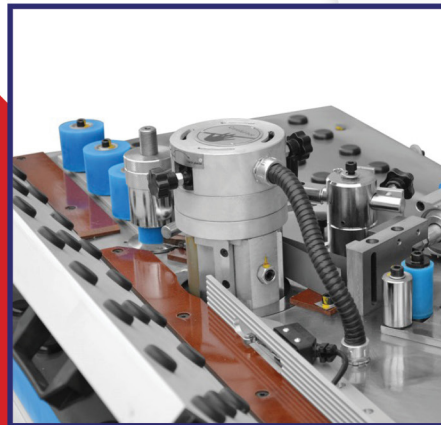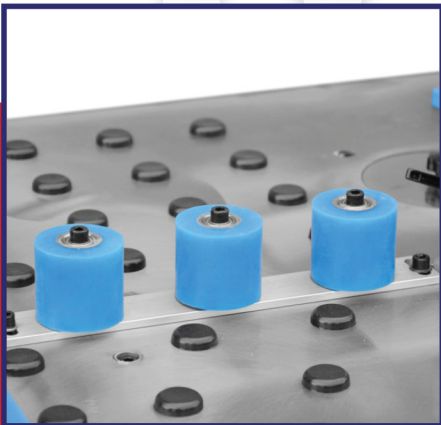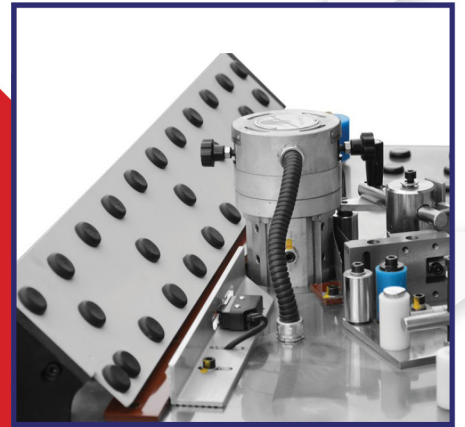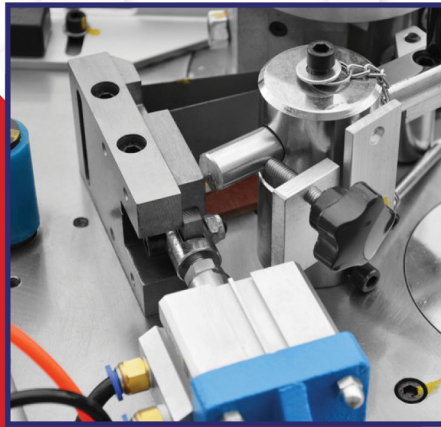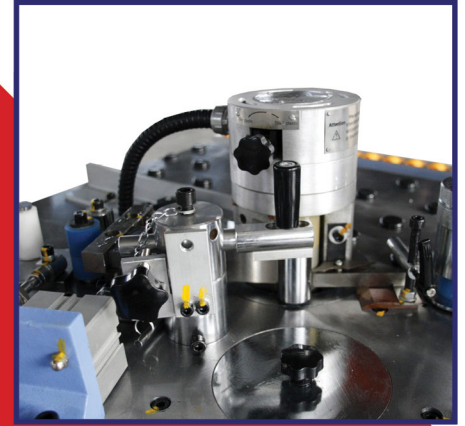

2

The machine adopts Taiwan Delta frequency transformer, which can stepless adjust the band feeding speed and glue shaft rotation speed.

3

Equipped with length control system, the edging band will be automatically cut according to set-up length, which greatly reduces the waste of the edging band.

4

The working table can be tilt from 0-60, suitable for bevel edge banding.

DETAILS



Speed controller



Curve meter




Temperature adjustment



Manually cut the band



Function switch, straight or curved

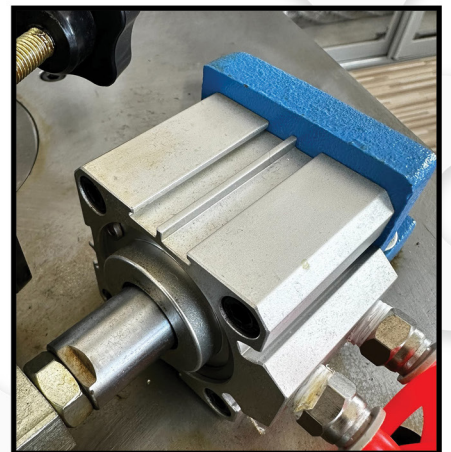

Pneumatic cut the band



Gluing adjustment



Limit switch for tape



Hot melt glue granules