




RK-CS13-PREMIUM

WIDE BELT SANDER

AN EXCELLENT CHOICE FOR INDUSTRIAL PRODUCTION



**1 YEAR WARRANTY
AND UNLIMITED SUPPORT**

Max working width	1300mm
The shortest processing length	500mm
Processing thickness	3-110mm
Conveyor speed	6-30m/min
Total power	63.37kW
First sand frame motor power	37kW
Second sand frame motor power	22kW
Conveyor motor wattage	4kW
Lifting motor power	0.37kW
First sand frame steel roller diameter	240mm
Second sander roller diameter	210mm
Abrasive belt size	1330x2200mm
Working pressure	0.6MPa
Dust collection	9600m ³ /h
Machine size	2700x2100x2100mm
Packing size	2800x2200x2200mm
Weight	3300kg

Wide belt sander is designed for three functions: thickness calibration, surface sanding and fine surface polishing. The two sanding belt can be used at the same time, or you can only use the 1st sanding belt or only used the 2nd sanding belt separately. Besides, the polishing pad can be adjusted up-and down to change the pressure according to different work piece.

1 Pre and fine sanding in one working process

2 Control Panel




- Adjusting of the aggregates, the feed speed and sanding depth can be carried out quickly, simply and accurately all from the control panel.
- A particular highlight is the digital grain compensation which does not require the machine to be opened.
- Using a switch on the control panel the machine can be set to the correct sanding belt grain or set to sand using the sanding shoe.

3 Powerful motors ensure perfect sanding results

- The constant power transmission onto the sanding aggregates is a significant factor in the process of producing a high quality sanding finish.

ADVANTAGE

- ➔ **Suitable for industrial use**
- ➔ **High quality cast iron machine table and aggregates**
- ➔ **Powerful and efficient**

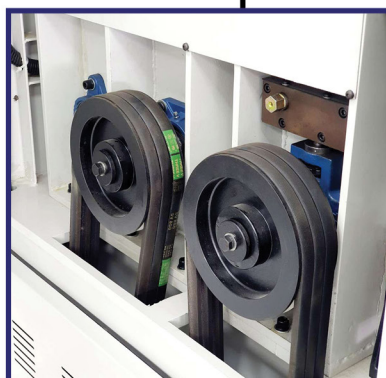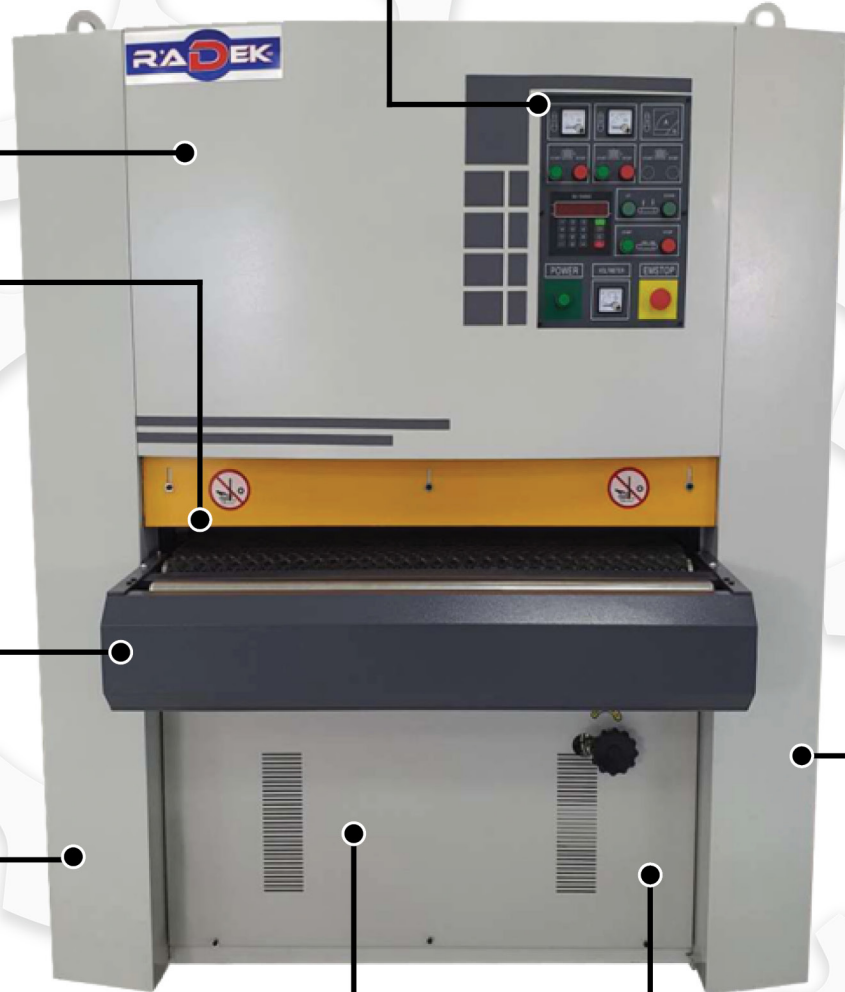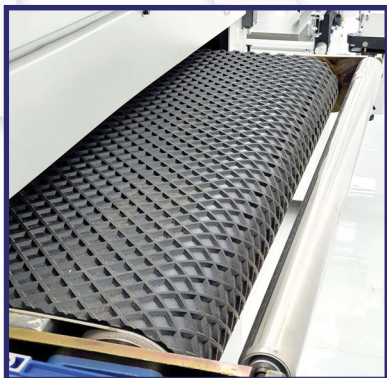

DETAILS




The first sand frame-steel roller



The second sand frame-rubber roller + graphite cloth



Motor

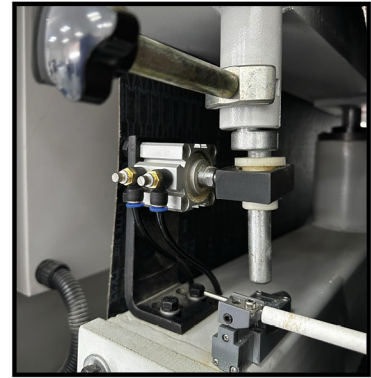

Eccentric shaft

