



ЧЕТВОРОСТРАНА МАШИНА

RK-FE4-ECO



РЕЗЕРВНИ ДЕЛОВИ

Right Side Cutter Head Motor

Type: Three-Phase Asynchronous Motor / Y90L-2
 Rated Voltage: AC 380V
 Rated Current: 4.7A
 Rated Power: 2.2kW
 RPM: 2850 rpm

THREE-PHASE ASYNCHRONOUS MOTOR						
TYPE Y90L-2	JB/T10391-2008		No. 53182			
2.2 kW	4.7 A		CONNECTION			
380 V	2850 r/min		Y Δ			
COSφ	S1	IM B5	CONN. Y			
INS. CL. B	50Hz	IP44	24 kg			
75 dB(A)	81.0%	201111				



Middle Cutter Head Motor

Type: Three-Phase Asynchronous Motor / Y90L-2
 Rated Voltage: AC 380V
 Rated Current: 4.7A
 Rated Power: 2.2kW
 RPM: 2850 rpm

THREE-PHASE ASYNCHRONOUS MOTOR						
TYPE Y90L-2	JB/T10391-2008		No. 53182			
2.2 kW	4.7 A		CONNECTION			
380 V	2850 r/min		Y Δ			
COSφ	S1	IM B5	CONN. Y			
INS. CL. B	50Hz	IP44	24 kg			
75 dB(A)	81.0%	201111				



Left Side Cutter Head Motor

Type: Three Phase Asynchronous Motor / Y112M-2
 Rated Voltage: AC 380V 50Hz
 Rated Current: 8A
 Rated Power: 4kW

THREE PHASE ASYNCHRONOUS MOTOR						
TYPE Y112M-2	JB/T10391-2008					
4 kW	50 Hz	380V	8.0A			
dB(A)	INSULATION B	CONNECTION				
r/min	S1	IP44	38 kg			
DATE	NO.					



Conveyor Tray Motor


Type: Three Phase Asynchronous Motor / Y100L-6
 Rated Voltage: AC 380V
 Rated Current: 4.0A
 Rated Power: 1.5kW
 RPM: 940rpm



THREE PHASE ASYNCHRONOUS MOTOR			
TYPE Y100L-6	OUTPUT 1.5kW	No. 161	
CURRENT 4.0 A	INSULATION B	VOLTAGE 380V	
CONNECTION	SPEED 940 r/min	50Hz	NOISE 67 dB(A)
	RATING S ₁	IP44	WEIGHT 30 kg
	STANDARD JB/T10391-2002		DATE 2009.05

Feed Rollers Gantry Height Adjustment Motor

Type: 3-Phase Induction Motor YE2-712-4
 Rated Voltage: AC 220V/380V 50Hz
 Rated Current: 1.85A/1.07A
 Rated Power: 0.37kW
 RPM: 1370rpm

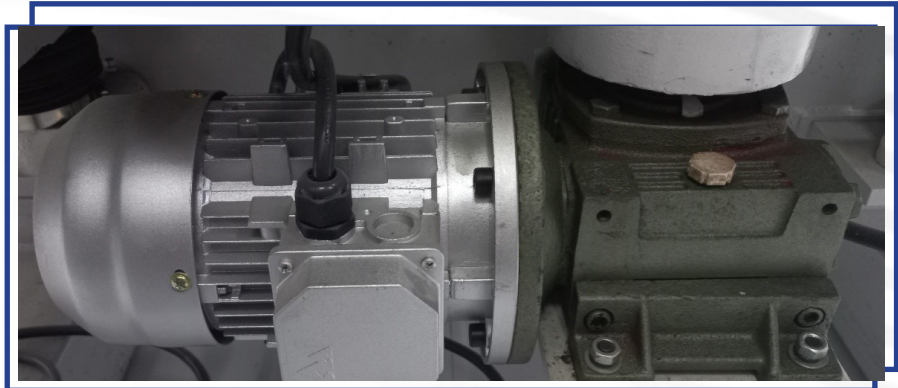

Feed Rollers Gantry Height Adjustment Worm Drive Assembly

Brand: HANGZHOU YUANLI
 Model: WPWDKO
 Type: Worm Drive Speed Reducer 60
 Reduction Ratio: 1:30



Sanding Roller

Position Fix Pinching Handle



Middle Side Cutter Head Motor

Type: Three-Phase Asynchronous Motor
 Rated Voltage: AC 380V 50Hz
 Rated Current: 4.7A
 Rated Power: 2.2kW
 RPM: 2850 rpm

THREE-PHASE ASYNCHRONOUS MOTOR					
TYPE Y90L-2	JB/T10391-2008	No. 53182			
2.2 kW	4.7 A	CONNECTION			
380 V	2850 r/min	Y			
COSφ	S1	IM B5	CONN. Y	W2 U2 V2	W2 U2 V2
INS. CL. B	50Hz	IP44	24 kg	U1 V1 W1	U1 V1 W1
75 dB(A)	81.0%	201111			



Right Side Cutter Head (Processes the bottom portion of the workpiece)

Diameter: 95mm
 Knife Length: 110mm



Middle Cutter Head (Processes the right portion of the workpiece)

Diameter: 95mm
Knife Length: 110mm



Middle Cutter Head (Processes the right portion of the workpiece)

Diameter: 95mm
Knife Length: 110mm



Left Side Cutter Head (Processes the top portion of the workpiece)

Diameter: 95mm
Knife Length: 110mm



Middle Spindle Head Dust Extraction System

Intake Diameter: 100mm



(Second) Middle Spindle Head Dust Extraction System

Intake Diameter: 100mm



Left Side Spindle Head Dust Extraction System

Intake Diameter: 100mm



Rubber Roller (x2)



Feed Rollers Motor Pulley

Diameter (Large) : 190mm
 Diameter (Small) : 155mm




Feed Rollers, Motor Transmission Belt

Brand: CMCROBOSSI
 Model: 1922V426
 Width: 30mm




Feed Transmission Gearbox Assembly (x4)

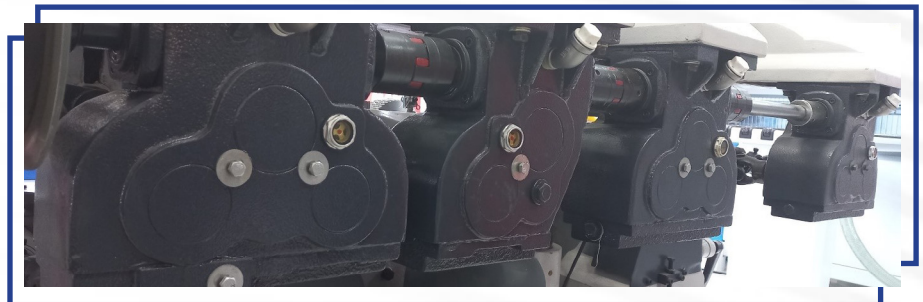


Feed Rollers Transmission Shaft

Shaft Diameter: 25mm

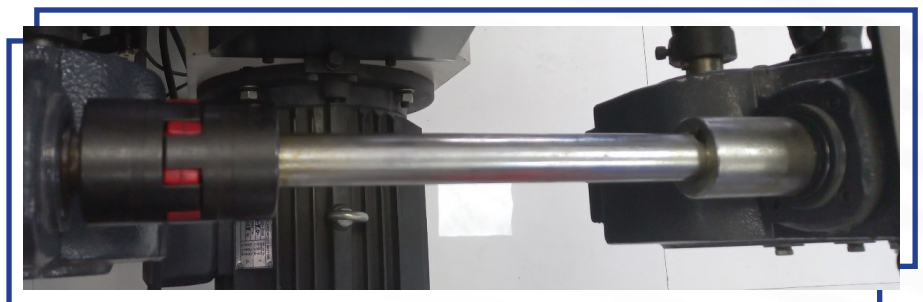

Feed Rollers Transmission Universal Joint

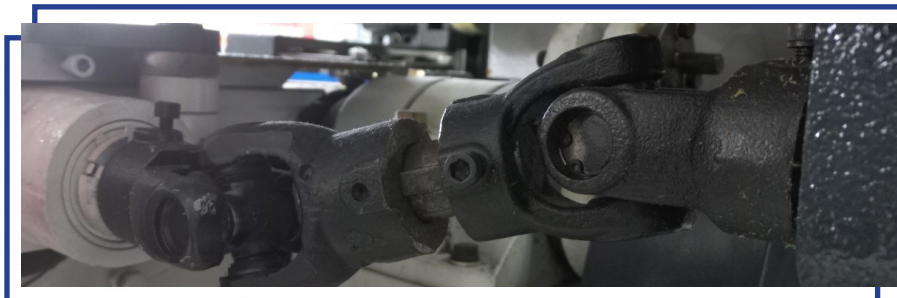


Positioning Pneumatic Actuator

Brand: TPM
 Piston Diameter: 32mm
 Stroke Length/Effective Travel: 30mm



Machine Work Table

Length: 2200mm
 Width: 195mm

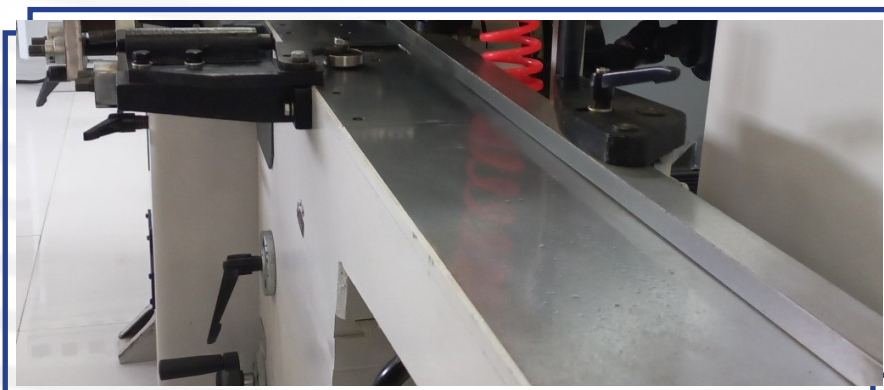



Initial Feed Roller (Bottom)

Diameter: 70mm



Initial Feed Roller (Top) (x3)

Diameter: 117mm
Width: 89mm

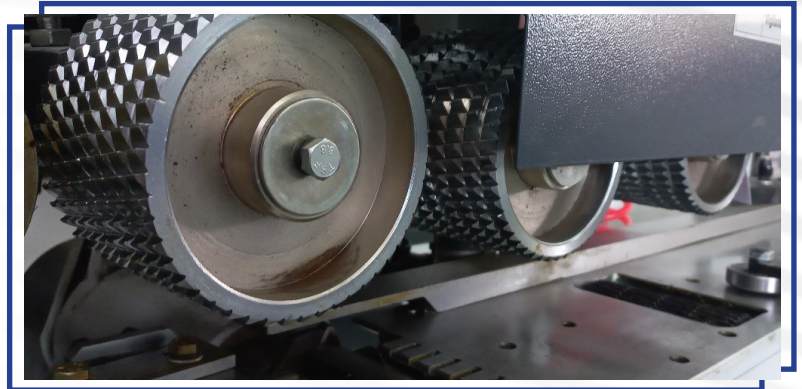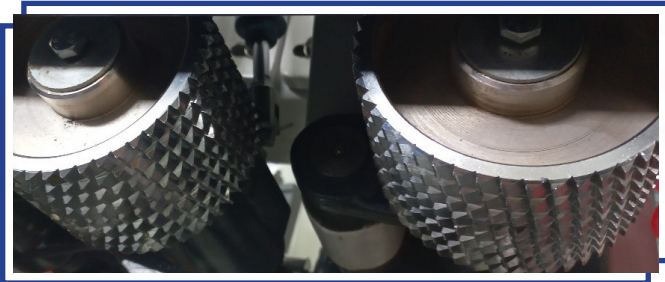


Right Side Mid Spindle Positioning Press

Diameter: 100mm
Width: 25mm




Secondary Feed Rollers (x2)

Diameter: 117mm
Width: 43mm

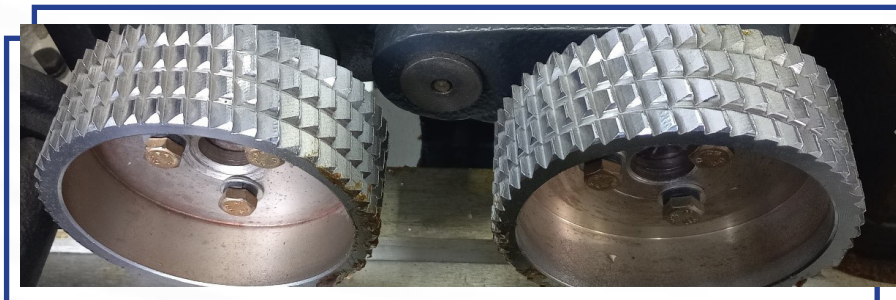


Sideway Positioning Roller (x2)

Diameter: 58mm
Width: 16mm

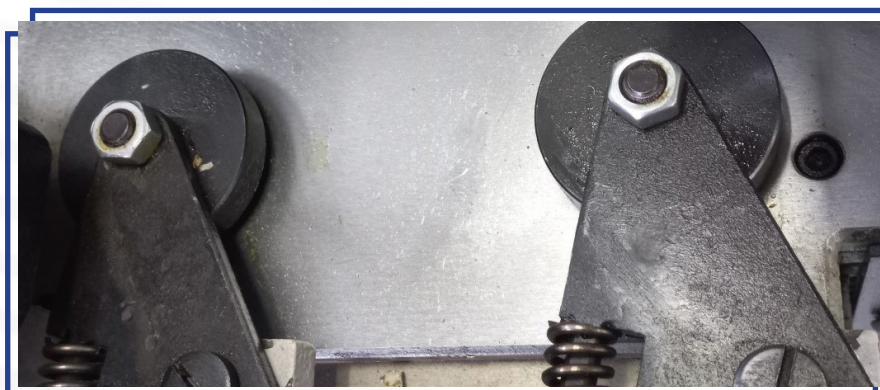

Main Power Switch

Type: HZ12-40/04

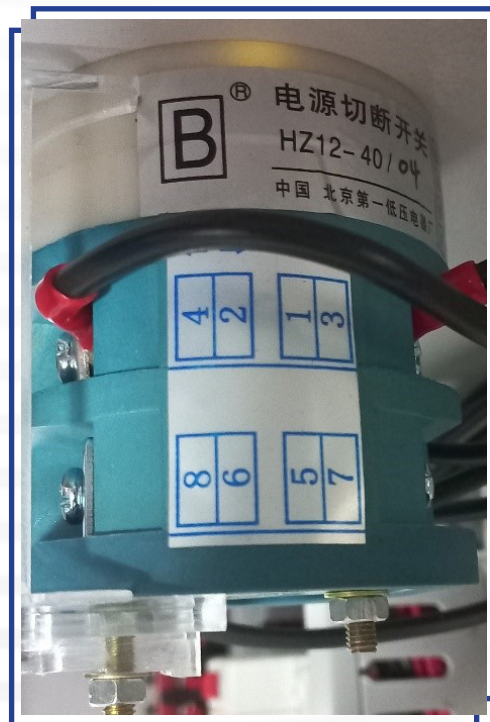


Power Switches


LED Indicator
 Brand: Bocheng
 Power: 220V




E-Stop Button
 Brand: Bocheng
 Model: LA239 (B) (LAY37)

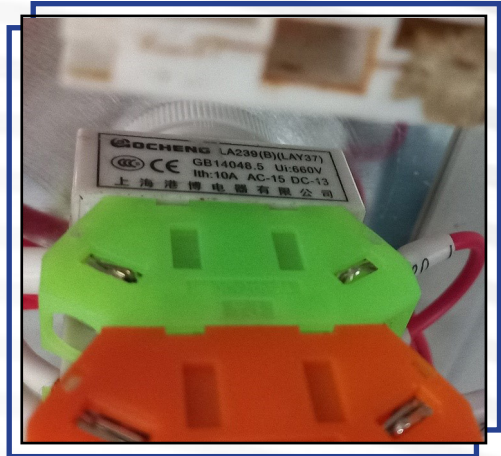

Power Buttons
 Model: ZB2-BE102C

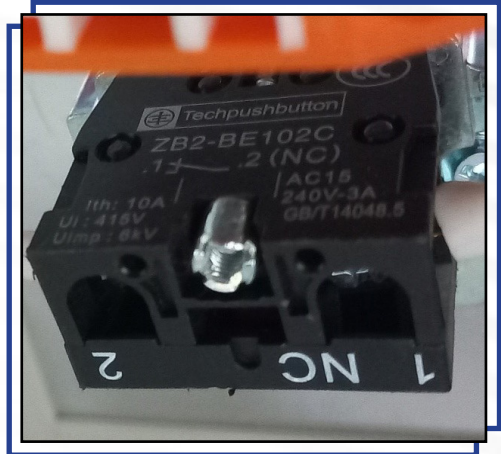

Flexible Star Coupling

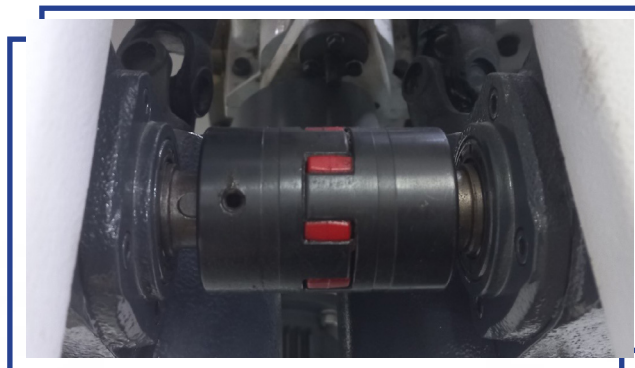


Circuit Breakers

Brand: Delixi
Model: DZ108-20
Current: 20A

(x5)




Brand: Delixi
Model: DZ47s
Range: C6
Current: 6A

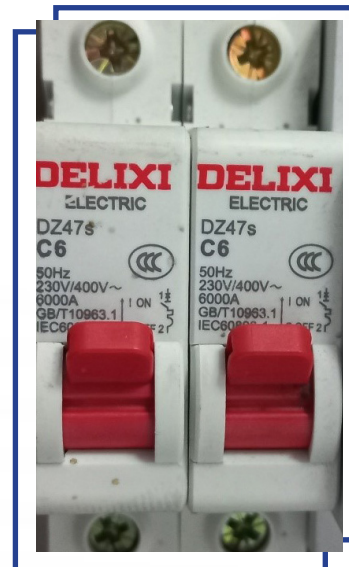

Contactors

Brand: Delixi
Model: CDC1-16-30-10
Voltage: AC 380V
Current: 16A

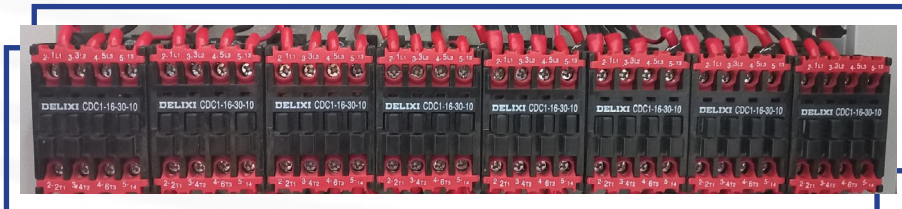

Electric Box Handle

Regulator:
Brand: SHUN FA
Type: Pneumatic Filter & Pressure Regulator
Model: AFR – 2000
Max Pressure: 1.0MPa
Tubing: 4mm

Separator

Brand: SHUN FA
Model: AL-2000



Cutter Head Height Adjustment Handle & Positioning Clamp (Handle) (Processes the bottom portion of the workpiece)




Cutter Head Height Adjustment Handle & Positioning Clamp (Handle) (Processes the right side portion of the workpiece)



Cutter Head Height Adjustment Handle & Positioning Clamp (Handle) (Processes the left side portion of the workpiece)



Cutter Head Height Adjustment Handle & Positioning Clamp (Handle) (Processes the top portion of the workpiece)

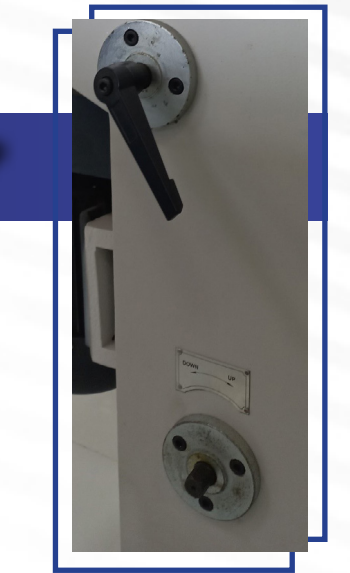



КОНТАКТ

☎ Информации: +389 70 215 994

☎ Продажен салон: 02 3095 002

✂ Сервис: +389 71 270 963

✉ Е-маил: info@radek.com.mk

🌐 Вебсајт: www.radek.com.mk

📍 Адреса: Јадранска Магистрала 716 Скопје
(Качанички пат, Индустриска зона Визбегово)

РАБОТНО ВРЕМЕ

Понеделник - Петок: 09:00-17:00

Сабота: 09:00-14:00



GOOGLE MAPS:
RADEK WOODWORKING
MACHINES



Web

www.radek.com.mk



Facebook

[radek.macedonia](https://www.facebook.com/radek.macedonia)



Instagram

[radek_woodworking_machines](https://www.instagram.com/radek_woodworking_machines)



Startuvaj.mk

www.startuvaj.mk



YouTube

[radek_woodworking_machines](https://www.youtube.com/radek_woodworking_machines)

**WOODWORKING AND
METALWORKING MACHINES**