



**RK1225-CP50-PRO**

# COLD PRESS MACHINE

STRUCTURE WITH HIGHEST LEVEL OF RESISTANCE AND RIGIDITY



DIFFERENT SIZES OF WORKING PLACE



**1 YEAR WARRANTY  
AND UNLIMITED SUPPORT**

Press platen dimensions	1250x2500mm
Max.total thrust	50T(2.5kg/cm <sup>2</sup> )
Pressure of hydraulic system	200kg/cm <sup>2</sup>
Max.platen opening	1000mm(1300mm optional)
Oil cylinder	125mm x 2pcs, 90mm x 2pcs
Hydraulic motor power	4 kW
Machine size	2900x1250x2300mm
Packing size	2900x1250x2300mm
Weight	2000kg

**The cold press is the main equipment for the production of cold press veneers for multilayer solid wood composite floors. Compared with the hot presser, the cold presser has a shorter reacting time, using cost is lower.**

**1** Suitable for pressing various types of laminations, on composite wood, cork board, ply, mdf, fiber board, honey comb board.

**2** Suitable for pressing & laminating on fiber boards, decorative papers, plywood & other lamination sheets. Use for various applications for furniture's & board lamination industries.

**3** It can be used for particle / MDF / HDF board.

**4** Mainly use to press various glued wood parts in usual temperature.

**5** Machine has characteristics as good splicing effect & fast high efficiency.

**6** Manual & semi-automatic controls.



**7** Rigid construction.

**8** Emergency stop switches.





# DETAILS

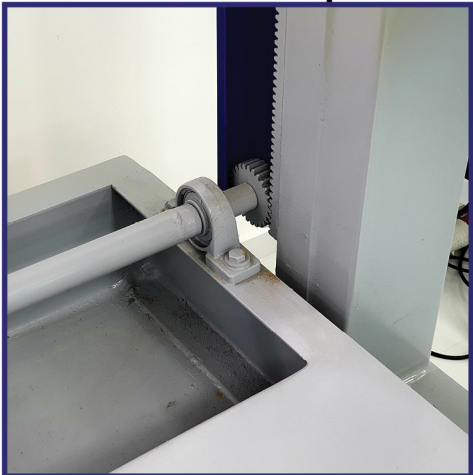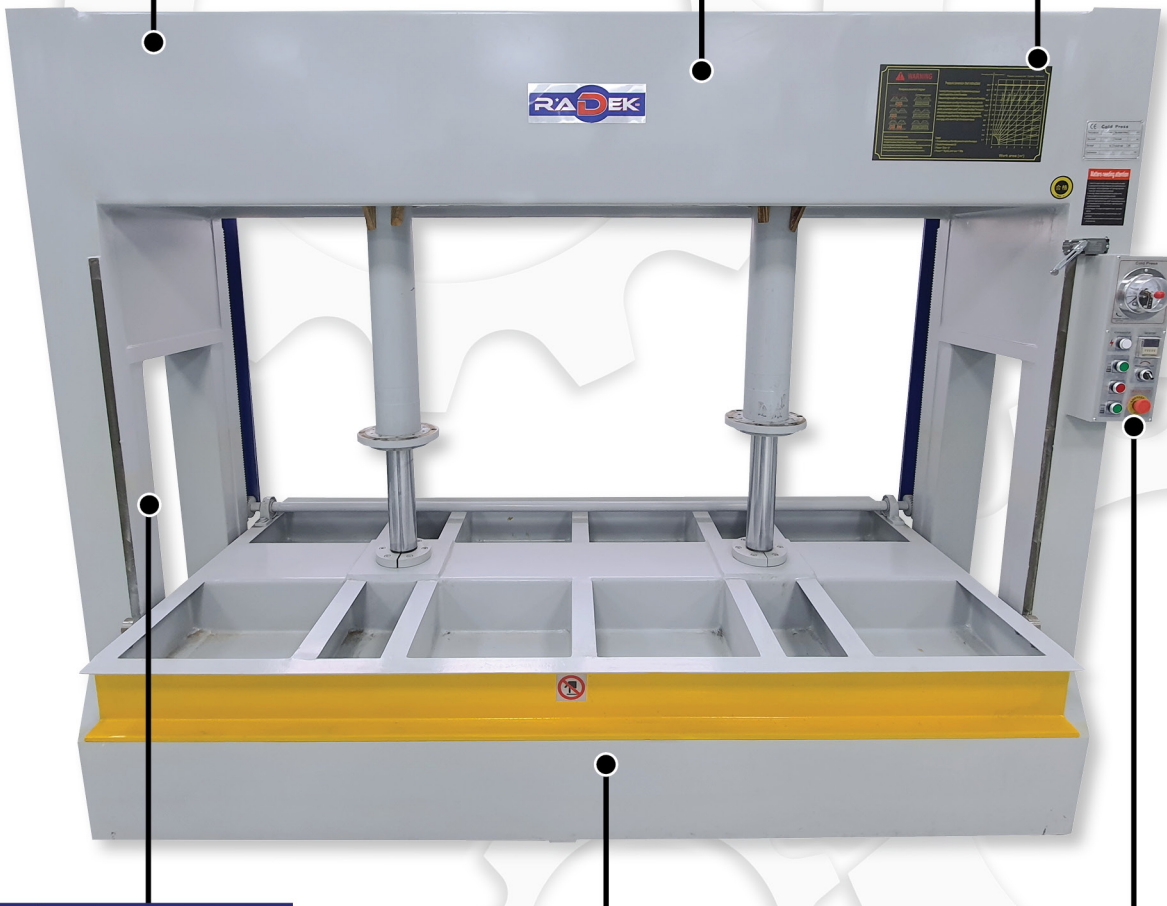

## Features:

### 1.STRUCTURE QUALITY

The sturdy structure has been engineered with a high safety coefficient to guarantee the highest level of resistance and rigidity in each processing phase.

### 2.HYDRAULIC CYLINDERS

The steel rod are electroplated, all gaskets are high resistance to guarantee long lifetime and perfect seal.

### 3.CONTROL PANEL

For controls and display with digital temperature controllers and adjustable timers for fully automatic cycle



CHECK UP OUR YOUTUBE CHANNEL FOR VIDEO

