



ЦНЦ НЕСТИНГ

RK-213-SERVO

РЕЗЕРВНИ ДЕЛОВИ



X-Axis Servo Motor

Brand: LeadShine
 Model: 863HSM80H-E1
 Step Angle: 1.2degrees
 Holding Torque: 7Nm
 Encoder Resolution: 1000cpr
 Shaft Diameter: 14mm



Y-Axis Servo Motor

Brand: LeadShine
 Model: 863HSM80H-E1
 Step Angle: 1.2degrees
 Holding Torque: 7Nm
 Encoder Resolution: 1000cpr
 Shaft Diameter: 14mm

Z-Axis Servo Motor


Brand: LeadShine
 Model: 863HSM80H-E1
 Step Angle: 1.2degrees
 Holding Torque: 7Nm
 Encoder Resolution: 1000cpr
 Shaft Diameter: 14mm



Spindle

Brand: HQD Asynchronous
 Model: GDF60-18Z/6.0
 Input Voltage: 380V 300HZ
 RPM: 18000
 kW/Power: 6kW (7.2kW peak)
 Current: 12.6A (15.5A peak)
 Cooling: Air Cooled
 Torque: 3.18Nm
 Spindle: ER32

F16230088

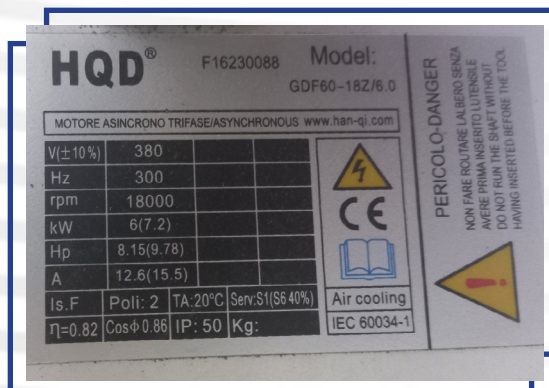


X-Axis Linear Rail (x2)

Model: HGR20
 Width: 20mm
 Height: 20mm




Y-Axis Linear Rail (x2)

Model: HGR20
 Width: 20mm
 Height: 20mm

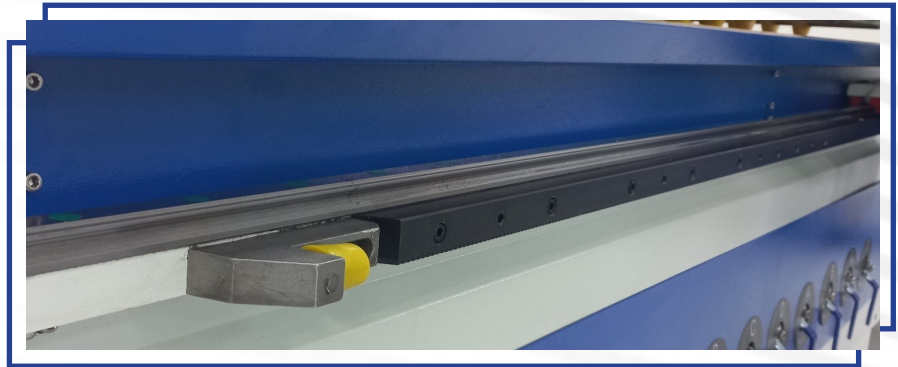

Z-Axis Linear Rail (x2)

Model: HGR20
 Width: 20mm
 Height: 20mm

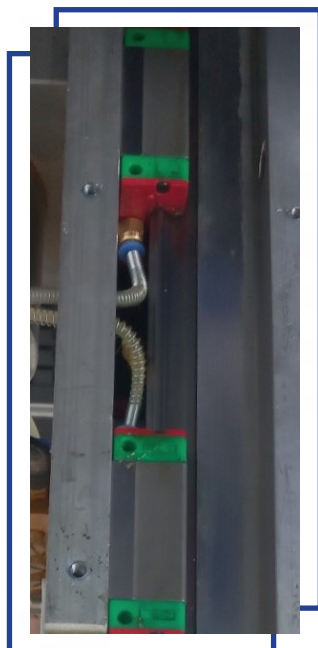


X-Axis Linear Ball Bearing Block/Carriage (x4)

Model: HG20
 Tubing: 4mm




Y-Axis Linear Ball Bearing Block/Carriage (x4)

Model: HG20
Tubing: 4mm

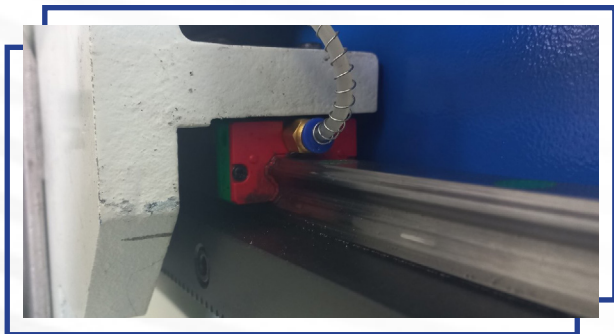


Z-Axis Linear Ball Bearing Block/Carriage (x4)

Model: HG20
Tubing: 4mm

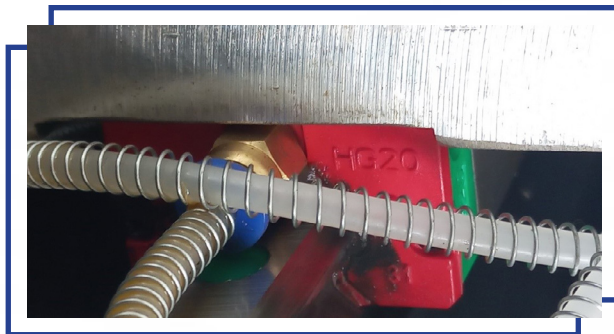

X-Axis Helical Rack

Width: 25mm
Height: 22mm
Angle: 30degrees

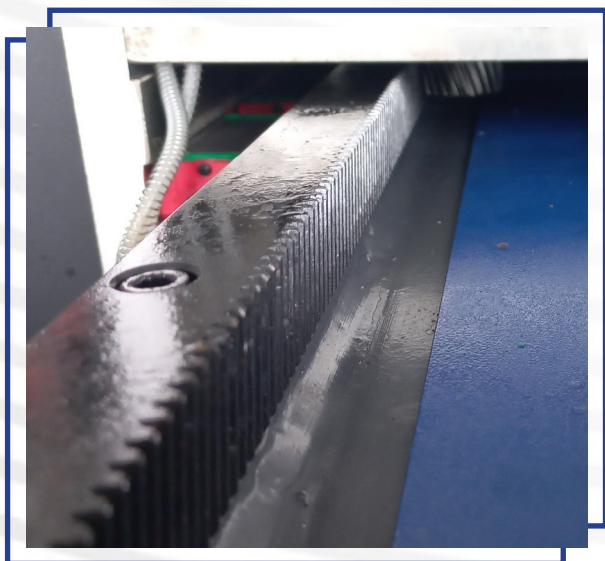


Y-Axis Helical Rack (x2)

Width: 25mm
Height: 22mm
Angle: 30degrees



Z-Axis Ballscrew

Diameter: 23mm

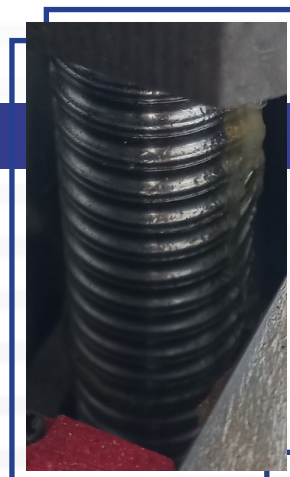

Inductive Proximity Switch/Sensor (x3)

Brand: JYKJ
 Model: SN05-NA1
 Power: DC 10-30V
 Detection Distance: 5mm




Pneumatic Manual Valve

Brand: Sandle Casatl
 Model: 4H210-08
 Standard: ISO9001
 Tubing: 8x5mm



Rubber Support Roller (x2)

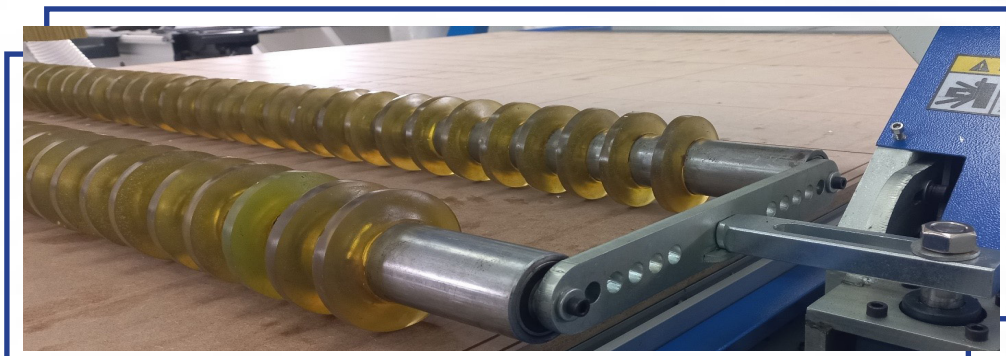


Servo Motor Mounting/Transmission Block



Pneumatic Actuator

Brand: Huatong Qidong
 Model: SC 50x75
 Pressure: 0.1-0.8Mpa
 Tubing: 8x5mm

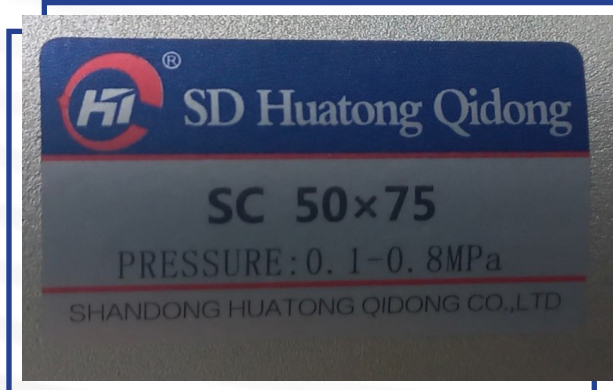


Automatic Oil Dispenser

Brand: Daloma
 Model: HC-2232-150X
 Input: AC 220V 50/60Hz
 Dispensing Amount: 110-150cc/min
 Dispensing Pressure: 2.0 Mpa
 Tubing: 4mm



Dust Extraction System (Spindle)

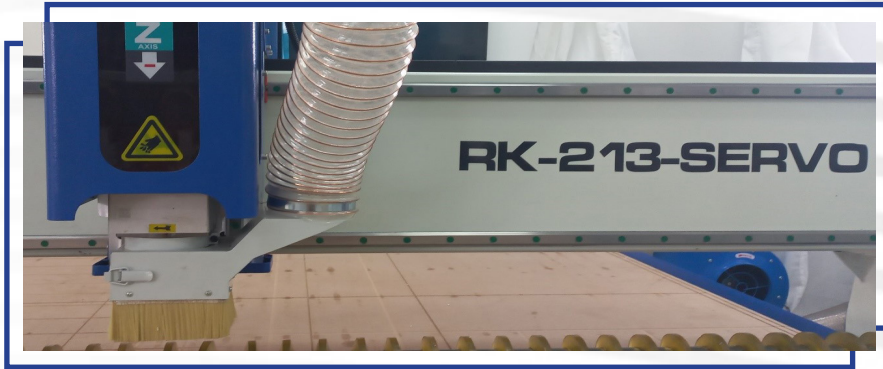


Spindle Head Dust Extraction Brush

Brushes Height: 60mm
Brushes Length: 110mm



Tool Height Calibration Sensor

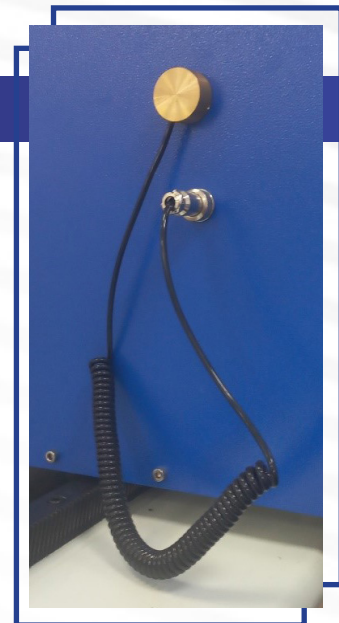


Vacuum Pump


Model: Baili 2GH810H27
 Power: 7,5kW 380V 50/60Hz
 Rpm: 2840rpm
 Flow: 530/600 m3/h
 Vacuum: -400/420 mBar
 Serial: Y230808114

Motor protector:


Baili DZ15LD-100
 2A-40A 1.1-11kW
 AC: 380V AC-3 50Hz

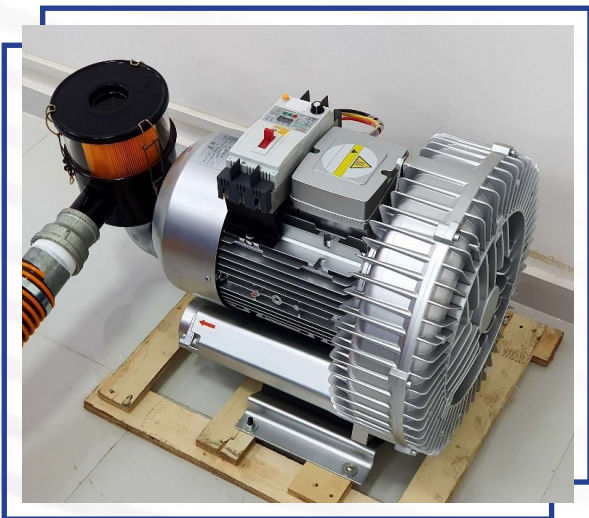

Z-Axis LeadScrew

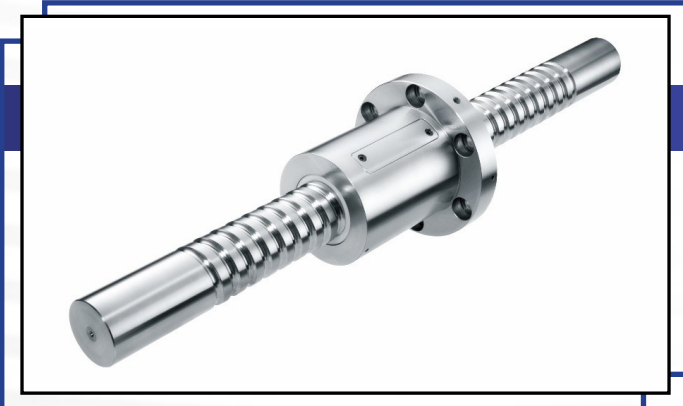

Vacuum Pump Manometer / Negative Pressure Gauge (x2)

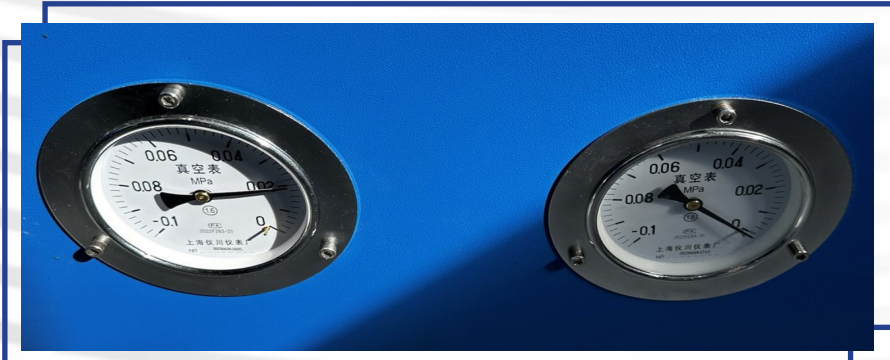

Servo Motor Drivers

Brand: LeadShine
 Model: H2-2206 AC Hybrid Servo Drive
 Input: 1PH AC 220V 50/60Hz
 Output: 0-220V 6.0A
 Pulse response frequency: 200KHz




Control Board

Brand: Weihong
 Model: Lambda 3S Motion Control System PM95A
 Max. Pulse Output frequency: 1MHz
 Serial Communication, baud rate 10Mbps



Power Supply 24V

Brand: GuanYang
 Model: GY75W-24-B
 Input: AC 110-220V 50/60Hz
 Output: DC 24V 3.2A

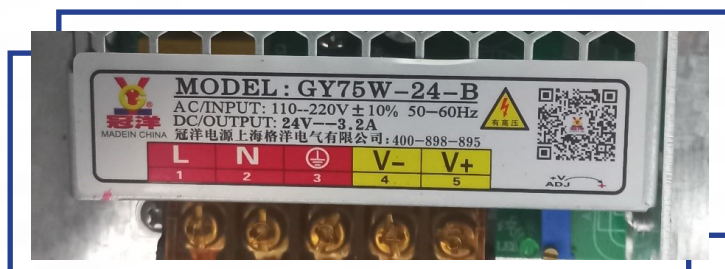


Power Supply 12V

Brand: GuanYang
 Model: GY25W-12-A
 Input: AC 110-220V 50/60Hz
 Output: DC 12V 2A



Inverter

Brand: Zhejiang Electric
 Model: BD618-7R5-4
 Input: 3PH 380V 50-60Hz
 Output: 3PH 0-380V 0-2000Hz
 Power: 7.5kW 18.0A

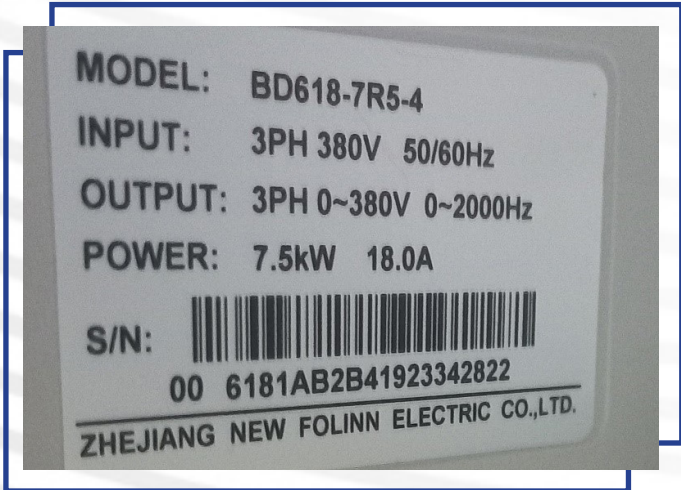

Power Button

E-Stop	- HELIJIA LAY38 LA38, LA39	UI 660V	GB/T 14048,5
On/Off	+ LED - HELIJIA LAY38 LA38, LA39	UI 660V	GB/T 14048,5
Dust Extraction	- TIANBO CHTBO LAY39	UI 660V	10A A032049
Vacuum Pump	- TIANBO CHTBO LAY39	UI 660V	10A A032049
Vacuum Pump	- TIANBO CHTBO LAY39	UI 660V	10A A032049



Main Circuit Breaker

Brand: Schneider Electric
 Model: IC65N C 63A
 A9F184453

Clip-on DIN rail mount:

Brand: Schneider Electric
 Model: A9V57463
 Power Rating: 63A 240-415V,
 trip sensitivity: 300mA



Contactor (x4)


Brand: Schneider Electric TeSys (x1)
 Model: LC1D32
 Power Rating: 3PH 32A ← 690V AC 25-400Hz

Brand: Schneider Electric TeSys
 Model: LC1D18
 Power Rating: 3PH 18A




Monitor Screen

Brand: Agen
 Model: XF190
 Input: DC 12V 2.5A

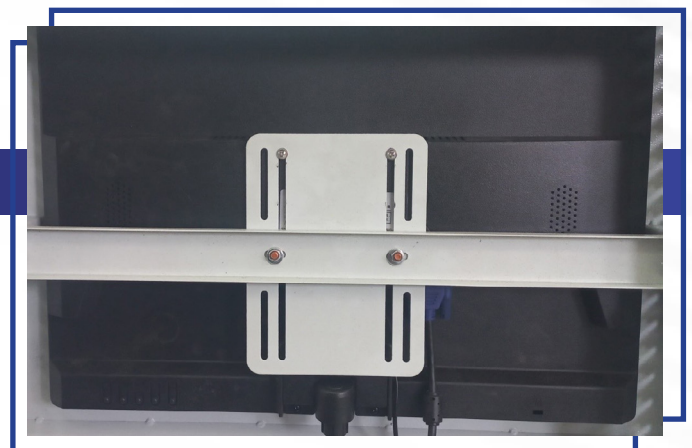


Physical End Stop (x6)

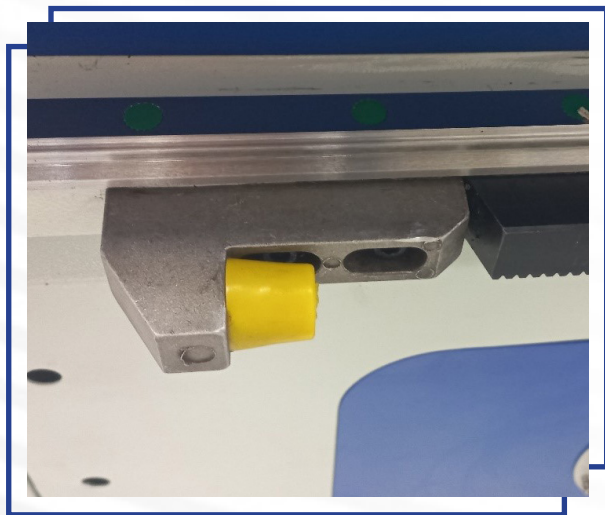

Dust Extraction Silicon Tube with Copper Wire



Anti-Shock, Anti-Vibration Leg Stand (x6)

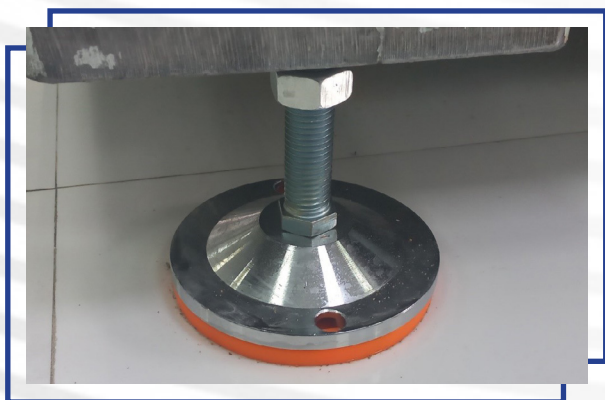


Z-Axis Ballscrew Mounting Blocks (x2)




Inner Vacuum System

Diameter: 80mm

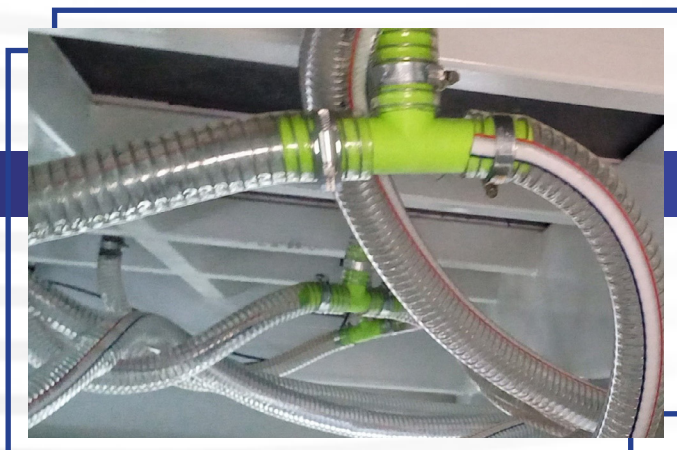

Vacuum Bed

Length: 3000mm
 Width: 2100mm
 Height: 24mm

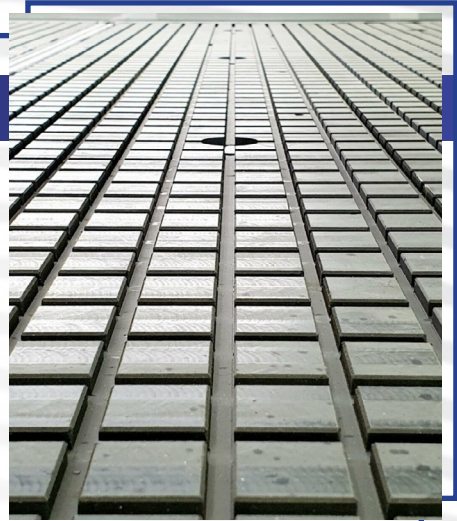

Main Pressure Regulator

Brand: Xingyue
 Model: AFC2000
 Pressure: 0.15-0.8MPa
 Tubing: 8x5mm




ER32 UM Collet Spanner




Positioners

Tubing: 6x4mm

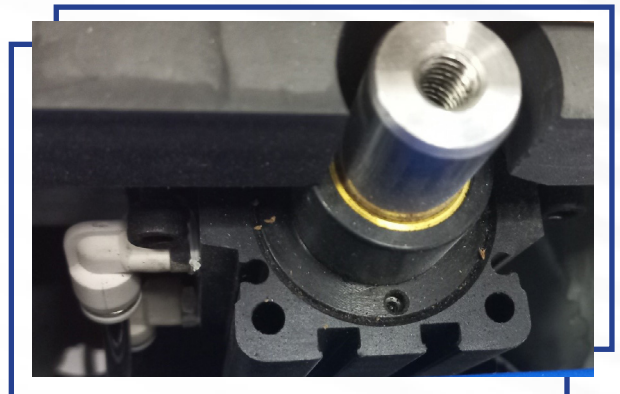


Oil Distribution Block

Intake Tubing Diameter: 4mm
Dispensing Tube Diameter: 4mm

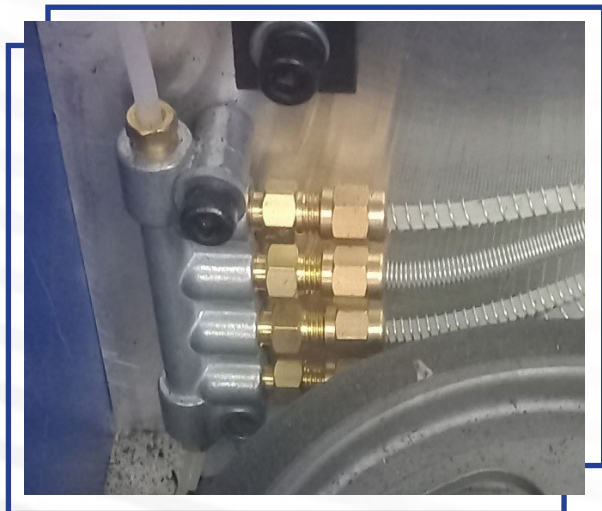

Helical Pinion (x3)

Diameter: 33mm
Shaft Diameter: 14mm
Angle: 30 degrees
Height: 20mm

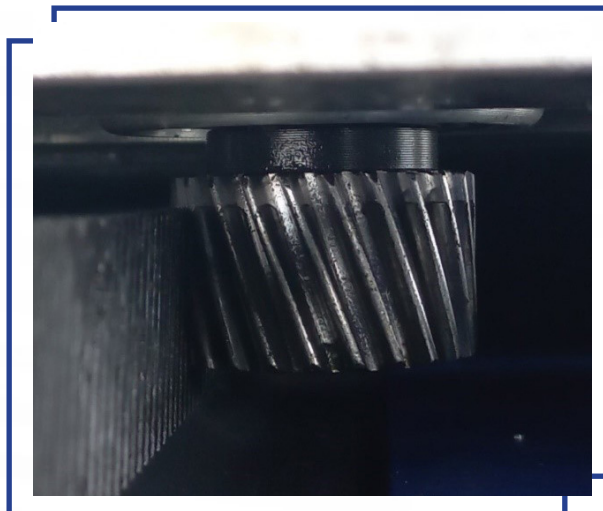


Transmission Pulley Timing Belt

Type: HTD 550-5M



Transmission Pulley (Large) (x3)

Diameter: 148mm
Shaft Diameter: 14mm
Height: 20mm

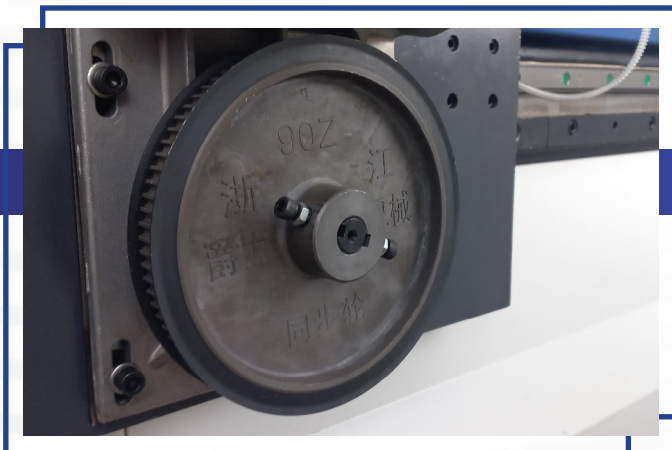


Transmission Pulley (Small) (x3)

Diameter: 35mm
 Shaft Diameter: 14mm
 Height: 20mm



X-Axis Drag Chain Cable Organizer

Cable Slot Diameter: 50mm
 Height: 35mm

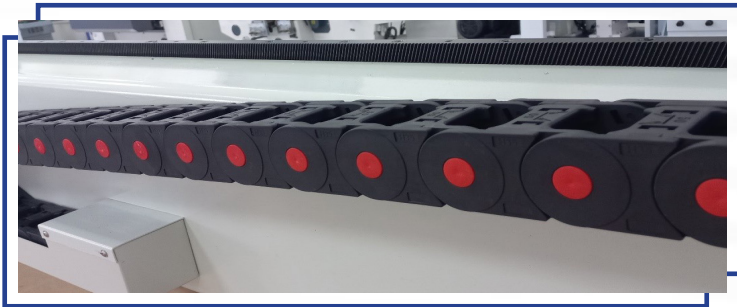

Y-Axis Drag Chain Cable Organizer

Cable Slot Diameter: 50mm
 Height: 35mm



Z—Axis Cable Organizer

Height: 40mm
 Width: 55mm



Electrical Cabinet Cooling Fans (x3)

Height: 150mm
 Length: 150mm





КОНТАКТ

☎ Информации: +389 70 215 994

☎ Продажен салон: 02 3095 002

✂ Сервис: +389 71 270 963

✉ Е-маил: info@radek.com.mk

🌐 Вебсајт: www.radek.com.mk

📍 Адреса: Јадранска Магистрала 716

РАБОТНО ВРЕМЕ

Пон.-Пет.: 09:00-17:00

Саб.: 09:00-14:00



GOOGLE MAPS:
RADEK WOODWORKING
MACHINES



Web

www.radek.com.mk



Facebook

[radek-woodworking machines](https://www.facebook.com/radek-woodworking-machines)



Instagram

[radek_woodworking_machines](https://www.instagram.com/radek_woodworking_machines)



Startuvaj.mk

www.startuvaj.mk



YouTube

[radek woodworking machines](https://www.youtube.com/radek-woodworking-machines)

**WOODWORKING AND
METALWORKING MACHINES**